



# Electronics International Inc.

## Price List

Effective April 30, 2024



---

**This Page Intentionally Left Blank**

---

# CONTENTS

MVP-50P Piston Engine Monitor & In-Flight Information System .....	<b>5</b>
MVP-50T Turboprop Monitor & In-Flight Information System .....	<b>8</b>
CGR-30P 3 1/8" for Single-Engine Piston Engine .....	<b>11</b>
CGR-30P 3 1/8" for Twin-Engine Pkg .....	<b>13</b>
CGR-30C Cluster Gauge Replacement .....	<b>14</b>
CGR-30 COMBO Pkg .....	<b>15</b>
TR-1 for Turboprops and Jet Engines .....	<b>16</b>
FP-5L Fuel Flow/Horsepower/Fuel Pressure with GPS Interface .....	<b>17</b>
Primary FP-5L Fuel Flow and/or Fuel Pressure with GPS Interface .....	<b>17</b>
FL-1, FL-2 Fuel Level Instruments .....	<b>18</b>
R-1 RPM, OPT-1 Oil Press/Temp, and M-1 Manifold Pressure Instruments ...	<b>19</b>
VA-1A Volt/Amp (Internal and External Shunt) Instruments .....	<b>20</b>
SC-5 Super Clock .....	<b>21</b>
USB Smart Charger .....	<b>21</b>
EGT, CHT, TIT and OAT Instruments .....	<b>22</b>
Combination Units (EGT, CHT, OAT, Carb. Temp.) .....	<b>23</b>
Remote Switches .....	<b>23 - 24</b>
Primary Remote Switches .....	<b>24</b>
EGT and CHT for Twins .....	<b>25</b>
Probes .....	<b>26</b>
Accessories .....	<b>27 - 31</b>
Experimental Aircraft Packages .....	<b>32</b>

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

---

**This Page Intentionally Left Blank**



## FOR SINGLE & TWIN PISTON ENGINE AIRCRAFT



### MVP-50P FOR PISTON ENGINE AIRCRAFT

(STC'd and TSO'd as Primary Replacement)

The MVP-50P is one of the industry's finest engine analyzer and systems monitor. The MVP-50P is a full-color, glass-paneled, completely customizable engine analyzer. The MVP-50P allows pilots to accurately monitor dozens of engine and system parameters, program redline limits, set up custom inputs, create interactive checklists, store general flight information, build flight plans, record and review pertinent data from every flight, and much more. One can cycle through 14 different flight data screens of valuable information to keep you up to date on all aspects of your aircraft's fuel status and engine health. The MVP-50P has been designed with the same thoughtful engineering that goes into every E.I. product, so even though the MVP-50P is one of the most powerful systems available, it is also sure to be one of the easiest systems to use in your cockpit.

**SPECIFICATIONS:** 5.52" x 5.16" x 1.8" depth. Viewable in direct and indirect sunlight.

**HARDWARE:** All of the probes and transducers are connected to the EDC (Engine Data Converter). This small box (4.5" x 3.5" x 2.2") converts all engine data to serial data, which is then provided to the MVP-50P via two wires. This reduces installation time and the wire bundle to the instrument panel by over 100 wires. The EDC can interface with any probe or transducer. The EDC comes prewired (i.e. the harnesses are provided with each MVP-50P package).

### TWIN PISTON ENGINE SOLUTION:



LEFT

RIGHT

Two MVP-50Ps provide the ultimate solution for a twin-engine aircraft. The moment an engine problem arises with either engine the digital display for the out-of-limit function will blink in the color of its current operating range. In addition, an external caution or warning light will blink giving the pilot the earliest possible indication of an issue. All the information needed for the engine in question is in a single display. You do not have to search the entire instrument panel to find the data necessary to make a decision.

The accuracy of the digital display for each engine parameter (M.P., RPM, Fuel Flow, etc.) allows the pilot to balance each engine's performance and synchronize the props with ease. Check out our website and see some of the twin-engine installations and the 14 additional screens available for the MVP-50P.

## ALL PACKAGES INCLUDE:

### HARDWARE INCLUDED:

MVP-50P Color Display Unit  
 EDC Engine Data Converter  
 Prewired Harness  
 All EGT & CHT Probes and Cables  
 Oil Pressure Transducer and Cable  
 Oil Temperature Probe and Cable  
 Fuel Pressure Transducer and Cable  
 Fuel Flow Transducer and Cable  
 OAT Probe and Cable  
 Two RPM Pickups and Cables  
 Manifold Pressure Transducer and Cable  
 Shunt (for AMPS) and Cable  
 Volts Pickup  
 1,000+ Hrs Data Recording  
 USB Memory Stick  
 AL-1R and AL-1Y (External Cautionary and Warning Lights)  
 AV-17 Voice Warning (For Experimentals Only)  
 Annunciator Interface  
 Resistive Fuel Interface

### OTHER FUNCTIONS INCLUDED:

Help Screen  
 EGT Differential  
 CHT Differential  
 Shock Cooling  
 Horsepower  
 Weight and Balance Data  
 Weight and Balance Graph  
 GPS Interface and Data  
 Fuel Efficiency  
 Fuel Used for the Trip  
 Fuel Used Since Fill Up  
 Time to Empty  
 Distance to Empty  
 Fuel to Waypoint  
 Data Recording  
 Time to Waypoint  
 Distance to Waypoint  
 Fuel Reserve  
 Time Reserve  
 Distance Reserve  
 Up Timer  
 Down Timer  
 Flight Timer  
 Tach Timer  
 Engine Hours  
 Date  
 Local Time  
 Zulu Time  
 Voice Warnings (For Experimentals Only)  
 Chelton & GRT Output

## PRICING:

### CERTIFIED PACKAGES

(TSO'd, STC'd. See AML for applicable aircraft)

<b>MVP-50P-4-C:</b> 4-Cylinder Package	\$ 7,000
<b>MVP-50P-6-C:</b> 6-Cylinder Package	\$ 7,500
<b>MVP-50P-7-C:</b> 7-Cylinder Package	\$ 7,800
<b>MVP-50P-8-C:</b> 8-Cylinder Package (Comes with two EDC-33Ps)	\$ 8,200
<b>MVP-50P-9-C:</b> 9-Cylinder Package (Comes with two EDC-33Ps)	\$ 8,500
<b>MVP-50P-4T-C:</b> Twin 4-Cylinder Package (two MVP-50P Packages, two EDC-33Ps)	\$14,600
<b>MVP-50P-6T-C:</b> Twin 6-Cylinder Package (two MVP-50P Packages, two EDC-33Ps)	\$15,600

### EXPERIMENTAL AIRCRAFT PACKAGES

<b>MVP-50P-4-Exp:</b> 4-Cylinder Package	\$ 6,000
<b>MVP-50P-6-Exp:</b> 6-Cylinder Package (For Engines over 350 hp specify the FT-90 Fuel Flow Transducer)	\$ 6,500
<b>MVP-50P-7-Exp:</b> 7-Cylinder Radial Package (For Engines over 350 hp specify the FT-90 Fuel Flow Transducer)	\$ 6,400
<b>MVP-50P-8-Exp:</b> 8-Cylinder Air Cooled Package (Comes with two EDC-33Ps)	\$ 7,200
<b>MVP-50P-8W-Exp:</b> 8-Cylinder Water Cooled Package	\$ 6,200
<b>MVP-50P-9-Exp:</b> 9-Cylinder Radial Package (Comes with two EDC-33Ps)	\$ 7,200
<b>MVP-50P-12W-Exp:</b> 12-Cylinder Water Cooled Package (Thunder Mustang)	\$ 6,300
<b>MVP-50P-4/6-FADEC-Exp:</b> 4 or 6-Cylinder FADEC Aerosance Package	\$ 5,700

### ORDERING INFO

An MVP-50P Configuration Worksheet must be filled out for each MVP ordered. This Configuration Worksheet provides information necessary to set up the MVP-50P for your aircraft. It also provides information to help you select options you may want to add to the system. You can download the Configuration Worksheet from our website.

## OPTIONS

**MVP-50P package prices listed on this Price List include some options listed below.**

<b>Type-K Cable:</b> XDO-8'-MVP, Type K, 8-foot extension cable with connectors and D-Sub pins (\$1.60 for each additional foot).	\$ 56
<b>Four-Wire Cable:</b> Cbl-4D-8'-MVP, 8-foot four-wire cable with connectors and D-Sub pins. (\$1.60 for each additional foot).	\$ 59
<b>G-Meter:</b> GS-3, 0.1g resolutions, +/- 8 g's max, for recording g's during the entire flight.	\$ 495
<b>TIT Probe:</b> Specify P-111 (1/8" NPT), P-112 (7/16" - 20) or P-114 (1/4" NPT), less cable.	\$ 140
<b>Carb Temp Probe:</b> P-128, 1/4" - 28, less cable.	\$ 128
<b>Aux Volts and Amps:</b> FM-VA-3 module. Provides three each amp channels and three each volt channels. Specify an S-50 (100 amp, standard) or S-300 (300 amp) shunt.	\$ 195
<b>Vacuum Pressure:</b> PT-05Diff, 0 to 6 In Hg.	\$ 248
<b>Airspeed:</b> PT-05Diff, 0 to 350 Kts indicated.	\$ 248
<b>Pressure Altitude:</b> PT-30Alt, up to 40,000 ft.	\$ 395
<b>Cabin Altitude:</b> PT-30ABS, up to 20,000 ft.	\$ 228
<b>Cabin Differential Pressure:</b> PT-05Diff, 0 to 6 In Hg.	\$ 248
<b>High Manifold Pressure:</b> PT-60ABS, 0 to 70 In Hg.	\$ 250
<b>Hydraulic Pressure:</b> PT-3000S, 0 to 3,000 psi.	\$ 380
<b>H2O Pressure:</b> PT-04H2O, measures pressure from 0 to 5" of water. Measure cowls, induction, ballonets, drag, etc.	\$ 250
<b>Upper Deck Pressure:</b> PT-30GA, 0 to 40 psi, for measuring Fuel Pressure on a turbocharged aircraft.	\$ 248
<b>Capacitive Fuel Level Probe:</b> P-300C (3/4") with Accessories (see Accessories at the back of this document).	\$ 500
<b>Mini Capacitive Fuel Level Probe:</b> P-300C Mini (see Accessories at the back of this document).	\$ 376
<b>Magnetic Float Sensor:</b> P-300M, accurate replacement for a resistive sensor (see Accessories at the back of this document).	\$ 540
<b>Balance Fuel Probes in a Tank:</b> FLAM-4, adds up to 4 Capacitive Fuel Level Probes and Provides 1 Output.	\$ 475
<b>Fuel Flow Differential Module:</b> FFDM-1-xx, for aircraft with a pressure carburetor Includes FT-60 or FT-90 flow transducer to measure the returned fuel. Specify FT-60 or FT-90 flow transducer.	\$ 500
<b>Fuel Flow Add Module:</b> FFAM-1 adds flow from two feed lines. Specify FT-60 or FT-90 flow transducer.	\$ 395
<b>Fuel Flow from a Pulsed Injector:</b> FM-Flow-P, measures Fuel Flow from a pulsed injector signal.	\$ 395
<b>Carbon Monoxide Detector:</b> By CO Guardian. Requires an RS232 Input Port 3 on the MVP, unit also provides Cabin Pressure (Altitude) and Cabin Temperature.	Contact EI
<b>Real-Time Data Out:</b> RTDO, provides Real Time Data out of the MVP-50.	\$ 667
<b>Gear Status:</b> Adds Gear Position Indicators.	\$ 995
<b>SureFly Ignition Interface:</b> VI-2UF.	\$ 48

## ACCESSORIES

<b>MVP Subpanel:</b> A 10.1" x 10.5" x .062" aluminum panel with a cutout for the MVP, which can be cut to size, allows front mounting of the MVP. This makes installation of the MVP much easier.	\$ 100
<b>MVP-50P, Display Only, Non TSO'd:</b> 1 EDC can drive multiple MVP-50P Displays.	\$3,550
<b>MVP-50P, Display Only, TSO'd:</b> 1 EDC can drive multiple MVP-50P Displays.	\$5,000
<b>EDC-33P:</b> Engine Data Converter. Adding a second EDC to the MVP, provides 30 additional channels. Requires Port 3.	\$1,600
<b>USB-8G:</b> USB Memory Stick, 8GB or larger. Used to upload and download data to the MVP-50P.	\$ 12
<b>CP-1-A:</b> LED Intensity Control Pot. External pot used to control the display intensity of the MVP-50P.	\$ 72
<b>USB-6A:</b> PMA'd and STC'd USB Smart Charger for CGR-30 Primary Engine Monitor System.	\$ 220



## MVP-50T ENGINE MONITOR FOR TURBOPROP AND JET ENGINE AIRCRAFT

(STC'd and TSO'd as Primary Replacement)

**ENGINE AND SYSTEM MONITORING:** The MVP-50T is a TSO'd unit that can replace over 15 engine instruments and 50 functions in a single full-color glass-panel display. The MVP-50T features programmable colors, ranges, limits and a voice alarm (for experimentals only) for each instrument displayed. A system page displays trims, flaps, gear status lights and many system parameters. Also, the MVP-50T incorporates a Crew Alert System (CAS) with 27 annunciators located at the top of the Main Engine Display Screen. These annunciators may be customized and programmed to display any color for the appropriate input signal.

**IN-FLIGHT DATA:** The MVP-50T provides many "Flight Data Screens" to reduce cockpit clutter and pilot workload. Some of these screens are: Fuel Management, Timers, Clocks and Date, Weight and Balance, Data Recording, Custom Checklists, Custom Flight Plans, General Information, Flight Log, Start Log, Max Data Log, Min Data Log and other screens. The pilot can easily generate custom checklists and flight plans and download them to the MVP-50T through the USB port.

**HARDWARE:** All of the probes and transducers are connected to the EDC (Engine Data Converter). This small box (4.5" x 3.5" x 2.2") converts all engine data to serial data, which is then provided to the MVP-50T via two wires. This reduces installation time and the wire bundle to the instrument panel by over 100 wires. The EDC can interface with any E.I. probe or transducer. The EDC comes pre-wired (i.e. the harnesses are provided with each MVP-50T package).



Main Screen



System Screen



## TWIN ENGINE SOLUTION:

**OPTIONS:** For a twin-engine turboprop aircraft, there are several options. You can choose a single MVP-50T with 8 arcs on the Main Screen, as shown at the left. This only leaves you with 6 additional digital gauges on the Main Screen and 4 strips and 7 digital gauges on the System Screen.

**OPTIMAL COMBINATION:** The most elegant option is to choose two MVP-50T systems configured as shown. This gives you 8 arc gauges, 12 strip gauges, 12 digital gauges and 38 annunciators all on the Main Screen. Also, as a backup, you can put some of the primary gauges shown on the Top MVP Display onto the System Screen of the bottom MVP Display.



**A CONSOLIDATED VIEW:** This combination of MVP-50Ts provides a consolidated view of instruments, gauges and annunciators that can clean up a crowded instrument panel while providing an accurate and reliable group of well-placed functions. One of the many impressive features of the MVP-50T is its ability to alert the pilot the moment a function or annunciator exceeds its programmed limit. Also, all data is recorded every 1/3 of a second for trend and limit analysis. Our MVP-50T Twin Engine Configuration Worksheet will help you configure the units (see [www.iFlyEi.com](http://www.iFlyEi.com); click on "Downloads" tab and look for the "MVP-50T" section).

**SPECIFICATIONS:** 5.52" x 5.16" x 1.8" depth. Accuracy: 1/2%. Viewable in direct and indirect sunlight. Backlit for night operation.

## ALL PACKAGES INCLUDE:

### HARDWARE INCLUDED:

MVP-50T Color Display Unit  
EDC Engine Data Converter  
N1 and N2 Pickup  
ITT Cable  
Torque Pressure Transducer  
Oil Pressure Transducer  
Oil Temperature Probe and Cable  
Fuel Pressure Transducer  
Fuel Flow Transducer  
OAT Probe and Cable  
Shunt (for AMPS)  
Volts Pickup  
USB Download/Upload Memory Stick  
1000+ Hrs Data Recording  
AL-1R External Red Warning Light  
AL-1Y External Yellow Caution Light  
Resistive Fuel Interface

### OTHER FUNCTIONS INCLUDED:

Help Screen  
Weight and Balance Data  
Weight and Balance Graph  
GPS Interface and Data  
Fuel Efficiency  
Fuel Used for the Trip  
Fuel Used Since Fill up  
Time to Empty  
Distance to Empty  
Fuel to Waypoint  
Time to Waypoint  
Distance to Waypoint  
Fuel Reserve  
Time Reserve  
Distance Reserve  
Up Timer  
Down Timer  
Flight Timer  
Engine Hours  
Cycles  
Date  
Local Time  
Zulu Time

## PRICING:

### MVP-50T FOR AG AIRCRAFT

**Certified:** MVP-50T Aircraft Package (TSO'd, STC'd, Ag Aircraft) ..... Starting at \$10,400  
**Certified:** MVP-50T L-39 Package (TSO'd Only) ..... \$24,995  
**Certified:** MVP-50T Twin Package (TSO'd Only) ..... Contact EI

**For Non-Ag Aircraft Turboprop and Jets, Please contact E.I. for Pricing.**

## ACCESSORIES

**MVP Sub-panel:** A 10.1" x 10.5" x .062" aluminum panel with a cutout for the MVP: ..... \$ 100  
**MVP-50T (Display Only):** 1 EDC can drive multiple MVP-50T Displays, TSO'd unit. .... \$6,500  
**EDC-33T:** Engine Data Converter. Adding a second EDC to the MVP provides 30 additional channels. .... \$3,300  
**USB-8G:** USB Memory Stick, 8GB or larger. Used to upload and download data to the MVP-50T: ..... \$ 12  
**CP-1-A:** LED Intensity Control Pot. External pot used to control the display intensity of the MVP-50T: ..... \$ 72

## OPTIONS

MVP-50T package prices listed on this Price List include some options listed below.

<b>Type-K Cable:</b> XDO-8'-MVP, Type K, 8-foot extension cable with connectors and D-Sub pins (\$1.60 for each additional foot).	\$ 56
<b>Four-Wire Cable:</b> Cbl-4D-8'-MVP, 8-foot four-wire cable with connectors and D-Sub pins. (\$1.60 for each additional foot).	\$ 59
<b>G-Meter:</b> GS-3, 0.1g resolution, +/- 8 Gs max, for recording Gs during the entire flight.	\$ 495
<b>TIT Probe:</b> Specify P-111 (1/8" NPT), P-112 (7/16"-20) or P-114 (1/4" NPT), less cable.	\$ 140
<b>Oil Temp Probe:</b> P-120-PA1 (7/16 in - 20).	\$ 220
<b>Carb Temp Probe:</b> P-128, 1/4" - 28, less cable.	\$ 128
<b>Aux Volts and Amps:</b> FM-VA-3 module. Provides three each amp channels and three each volt channels. Specify a S-50 (100 amp, standard) or S-300 (300 amp) shunt.	\$ 195
<b>Vacuum Pressure:</b> PT-05Diff, 0 to 6 In Hg.	\$ 248
<b>Airspeed:</b> PT-05Diff, 0 to 350.	\$ 248
<b>Pressure Altitude:</b> PT-30Alt, up to 40,000 ft.	\$ 395
<b>Cabin Altitude:</b> PT-30ABS, up to 20,000 ft.	\$ 228
<b>Cabin Differential Pressure:</b> PT-05Diff, 0 to 6 In Hg.	\$ 248
<b>High Manifold Pressure:</b> PT-60ABS, 0 to 70 In Hg.	\$ 250
<b>Hydraulic Pressure:</b> PT-3000S, 0 to 3,000 psi.	\$ 380
<b>H2O Pressure:</b> PT-04H2O, measures pressure from 0 to 5" of water. Measure cowls, induction, ballonets, drag, etc.	\$ 250
<b>Upper Deck Pressure:</b> PT-30GA, 0 to 40 psi, for measuring Fuel Pressure on a turbocharged aircraft.	\$ 248
<b>Capacitive Fuel Level Probe:</b> P-300C (3/4") with accessories (see "Accessories" section at the back of this document).	\$ 500
<b>Mini Capacitive Fuel Level Probe:</b> P-300C Mini (see Accessories at the back of this document).	\$ 376
<b>Magnetic Float Sensor:</b> P-300M, accurate replacement for a resistive sensor (see "Accessories" at the back of this document).	\$ 540
<b>Balance Fuel Probes in a Tank:</b> FLAM-4, adds up to 4 Capacitive Fuel Level Probes and provides 1 Output.	\$ 475
<b>Fuel Flow Differential Module:</b> FFDM-1-xx, for aircraft with a pressure carburetor. Includes FT-60 or FT-90 flow transducer to measure the returned fuel. Specify FT-60 or FT-90 flow transducer.	\$ 500
<b>Fuel Flow Add Module:</b> FFAM-1 adds flow from two feed lines. Specify FT-60 or FT-90 flow transducer.	\$ 456
<b>Fuel Flow from a Pulsed Injector:</b> FM-Flow-P, measures Fuel Flow from a pulsed injector signal.	\$ 395
<b>Carbon Monoxide Detector:</b> By CO Guardian, Requires an RS232 Input Port 3 on the MVP, unit also provides Cabin Pressure (altitude) and Cabin Temperature.	\$ 695
<b>Real-Time Data Out:</b> RTDO, provides Real Time Data out of the MVP-50.	Contact EI

# CGR-30P for Single Engine Piston Aircraft



## CGR-30P COLOR ENGINE MONITOR (STC'd and TSO'd as Primary Replacement)

Our STC'd/TSO'd CGR-30P can replace many of your aircraft's existing primary instruments. Because the CGR-30P is installed in a standard 3 1/8" hole, it doesn't protrude from your panel or cover adjacent instruments. This gives the CGR-30P a distinct advantage over the competition because it seamlessly integrates into your panel, is easy to install and is the perfect size to fit into an aircraft panel.

One of the many impressive features of the CGR-30P is its ability to alert the pilot the moment a function exceeds its programmed limit. All engine data is displayed in one location. There's no need to search the entire instrument panel to obtain critical data.


Our CGR-30P Configuration Worksheet will help you configure your instrument (see [www.iFlyEi.com](http://www.iFlyEi.com); click on "Downloads" tab and look for the "CGR-30P" section).

**SPECIFICATIONS:** 3.125" x 3.125" x 4.45" depth. Accuracy: 1/2%. Viewable in direct and indirect sunlight. Backlit for night operation.

### AVAILABLE FUNCTIONS:


The CGR-30P features a state-of-the-art, full-color bar graph which assists with ROP/LOP leaning. Additionally, the bar graph provides both "normalized" and digital readout screens. Other bar graphs may not provide nearly as many options as the CGR-30P. In addition to its bar graph, the CGR-30P can be configured to display a combination of the functions listed at the right.

RPM	Fuel Level	Tach Timer
M.P.	Fuel Flow	Local Time
EGT/CHT Bar Graph	Fuel Remaining	Zulu Time
Oil Pressure	Fuel Used	Annunciators
Oil Temperature	GPS Fuel Page	Data Recording
TIT	Low Fuel Alarm	USB Port
Hyd Pressure	Recurring	External
C.O.	Fuel Alarm	Caution Lights
OAT	Volts	And More
Vac	Amps	
Fuel Pressure	Flight Timer	

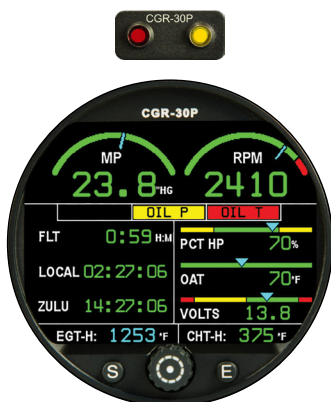

### SECONDARY SCREEN

This screen displays six additional functions on the CGR-30P, as well as annunciators to display Main Screen alerts.

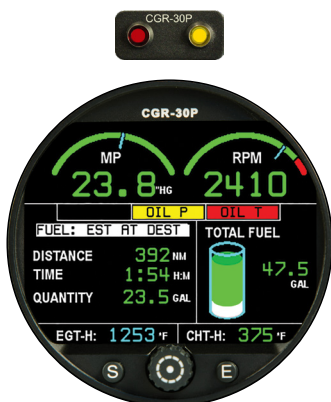

### GPS DATA SCREEN

This screen allows you to select between Fuel Flow, Fuel Remaining and GPS-related data.



### FUEL QUANTITY SCREEN

This screen displays the estimated Fuel Remaining for each tank, based on current Fuel Flow.

### AVAILABLE SCREENS:

In addition to the "Main Screen", the CGR-30P offers a "Secondary Screen", a "Fuel Quantity Screen" and a "GPS Data Screen." These additional screens give the CGR-30P excellent flexibility.



## CGR-30P BASIC

(STC'd and TSO'd as Primary Replacement)

**Included:** RPM, Fuel Flow, EGT/ CHT Bar Graph, Fuel Remaining, Volts, OAT, Tach Time, Local Time, Zulu Time, Flight Timer, Fuel Used for the Flight, Fuel Used Since Fill Up and all GPS/Fuel Flow Data. No additional function can be added.

## CGR-30P PREMIUM

(STC'd and TSO'd as Primary Replacement)

**Included:** RPM (Arc Gauge), EGT/CHT Bar Graph, Fuel Remaining, Fuel Used, GPS/Fuel Flow Data, Eng Time and Tach Time.

### Choose Four Primary Functions From:

Oil P, Oil T, Fuel Flow (requires an FFDM-1 for an additional \$456), Fuel Pressure, Right Fuel Level, Left Fuel Level, Aux Fuel Level, TIT, Vac, Volts and Carbon Monoxide Detector (Additional \$695).

### Choose Up To Five Additional Functions at No Cost:

OAT, HP (requires RPM and MP), Flight Timer, Local Time, Zulu Time, Hydraulic Press, Fuel Flow (if not selected as a primary), G-Meter, Fuel Level(s) for a tank that does not feed the engine, Carb Temp or IAT, Amps, or Second Amp Measurement.

## CERTIFIED PRICING:

<b>CGR-30P-4-B:</b> 4-Cylinder Basic Package:.....	\$ 3,798
<b>CGR-30P-6-B:</b> 6-Cylinder Basic Package:.....	\$ 4,598
<b>CGR-30P-7-B:</b> 7-Cylinder Basic Package:.....	\$ 5,448
<b>CGR-30P-8-B:</b> 8-Cylinder Basic Package:.....	\$ 5,468
<b>CGR-30P-9-B:</b> 9-Cylinder Basic Package:.....	\$ 5,498
<b>CGR-30P-4-P:</b> 4-Cylinder Premium Package:.....	\$ 4,598
<b>CGR-30P-6-P:</b> 6-Cylinder Premium Package:.....	\$ 4,998
<b>CGR-30P-7-P:</b> 7-Cylinder Premium Package:.....	\$ 5,898
<b>CGR-30P-8-P:</b> 8-Cylinder Premium Package:.....	\$ 5,948
<b>CGR-30P-9-P:</b> 9-Cylinder Premium Package:.....	\$ 5,998
<b>CGR-30P-B-A:</b> *4 or 6 Cylinder Basic UPGRADE Package with Trade-In Engine Analyzer.....	\$ 3,498*
<b>CGR-30P-B-AF:</b> **4 or 6 Cylinder Basic UPGRADE Package with Trade-In Engine Analyzer + Fuel Flow.....	\$ 3,398**
<b>CGR-30P-P-A:</b> *4 or 6 Cylinder Premium UPGRADE Package with Trade-In Engine Analyzer.....	\$ 4,298*
<b>CGR-30P-P-AF:</b> **4 or 6 Cylinder Premium UPGRADE Package with Trade-In Engine Analyzer + Fuel Flow.....	\$ 4,098**

\* Add \$300 core charge, which will be refundable when trade-in Engine Analyzer is received.

\*\*Add \$400 core charge, which will be refundable when trade-in Engine Analyzer & Fuel Flow Instrument is received.

## CGR-30P BASIC & PREMIUM EXPERIMENTAL PACKAGES

(Non-Certified)

Electronics International offers a wide range of Engine Monitors for Experimental aircraft, including CGR-30Ps, crafted for those seeking advanced features without FAA certification. These models give pilots the ultimate flexibility they desire.

## EXPERIMENTAL PRICING:

<b>CGR-30P-4-Exp:</b> CGR-30P Experimental 4-Cylinder Package (Non-Certified):.....	\$ 2,400
<b>CGR-30P-6-Exp:</b> CGR-30P Experimental 6-Cylinder Package (Non-Certified):.....	\$ 2,600
<b>CGR-30P-P-A*:</b> 4 or 6 Cylinder Premium UPGRADE Package with Trade-In Engine Analyzer.....	\$ 2,000*
<b>CGR-30P-P-AF**:</b> 4 or 6 Cylinder Premium UPGRADE Package with Trade-In Engine Analyzer + Fuel Flow.....	\$ 1,900**

\* Add \$300 core deposit, which will be refundable when trade-in Engine Analyzer is received.

\*\*Add \$400 core deposit, which will be refundable when trade-in Engine Analyzer & Fuel Flow Instrument is received.



# CGR-30P for Twin Engine Piston Aircraft

## CGR-30P TWIN PACKAGE

(STC'd and TSO'd as Primary Replacement)

Two Premium CGR-30P heads are included at prices listed below. Options below are per head.

**INCLUDED ON BOTH HEADS:** RPM (Arc Gauge), EGT/CHT Bar Graph, Fuel Remaining, Fuel Used, GPS/Fuel Flow Data, Eng Time and Tach Time.

**CHOOSE SECOND ARC FOR EACH HEAD:**


M.P. or Fuel Flow

**CHOOSE FOUR PRIMARY FUNCTIONS FOR EACH HEAD:**

Oil P, Oil T, Fuel Flow, Fuel Pressure, Main Fuel Levels (Fuel level sensors not included), Aux Fuel Level, TIT, Vac, Volts and Carbon Monoxide Detector (additional \$695).

**CHOOSE UP TO FIVE ADDITIONAL FUNCTIONS AT NO COST:**

OAT, HP (requires RPM and MP), Flight Timer, Local Time, Zulu Time, Hydraulic Press, Fuel Flow (if not selected as a primary), G-Meter, Fuel Level(s) for a tank that does not feed the engine, Carb Temp or IAT (for both heads), Amps (left & right), or third Amp measurement.

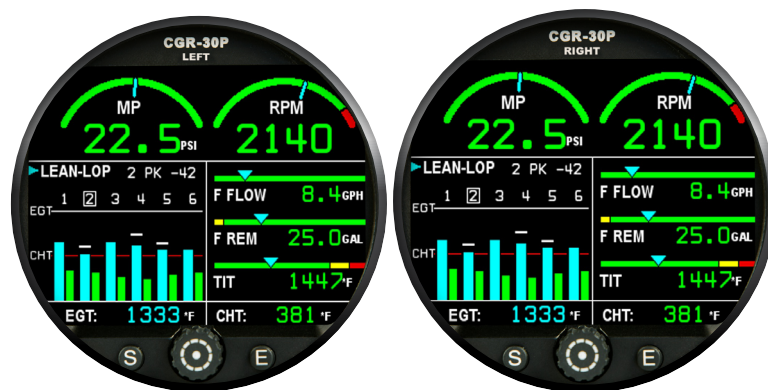

Left Engine

Right Engine

**SPECIFICATIONS:** Each instrument fits a standard 3 1/8" Hole. Dimensions: 3.125" x 3.125" x 4.45" depth. Accuracy: 1/2%. Viewable in direct and indirect sunlight. Backlit for night operation. STC'd and TSO'd as Primary Replacements.

## PRICING:

### CGR-30P TWIN PACKAGE

4-Cylinder: ..... \$ 8,998

6-Cylinder: ..... \$ 9,998

## CGR-30P TWIN COMBO PACKAGE (Two Premium CGR-30P's and One CGR-30C)



LEFT ENGINE



CGR-30C



RIGHT ENGINE

## PRICING:

### TWIN CGR-30P + CGR-30C

4-Cylinder: ..... \$ 10,698

6-Cylinder: ..... \$ 11,598

## UPGRADES

4 or 6-Cyl. with Trade-In Engine Analyzer ..... \$ 9,398\*

\* Add \$300 core deposit, which will be refundable when trade-in Engine Analyzer is received.

4 or 6-Cyl. with Trade-In Engine Analyzer + Fuel Flow ..... \$ 8,998\*\*

\*\* Add \$400 core deposit, which will be refundable when trade-in Engine Analyzer & Fuel Flow Instrument is received.

# CGR-30C Cluster Gauge Replacement



**SHOWN WITH ALL STRIP GAUGES**

## CGR-30C PACKAGE

(STC'd and TSO'd as Primary Replacement)

The CGR-30C can replace up to 16 Primary Instruments, so you can possibly remove an ENTIRE INSTRUMENT CLUSTER and replace it with a single 3 1/8" instrument. Oil Temperature/Pressure, Fuel Pressure, even Fuel Level instruments can now be removed to give you the peace of mind that comes from flying behind excellent, technologically advanced engine and system monitoring equipment.

Another option is to replace your RPM, Manifold Pressure and cluster gauges with our accurate and reliable CGR-30C and keep your current engine analyzer. Removing your RPM gauge provides a mounting location for the CGR-30C.

**SPECIFICATIONS:** Each instrument fits a standard 3 1/8" Hole. Dimensions: 3.125" x 3.125" x 4.45" depth. Accuracy: 1/2%. Viewable in direct and indirect sunlight. Backlit for night operation. STC'd and TSO'd as Primary Replacements.



**CHECKLIST SCREEN**

### CHOOSE UP TO 8 FUNCTIONS:

Fuel Flow (requires an FFDM-1. Additional \$456), RPM (Arc Gauge), Manifold (Arc Gauge), EGT, CHT, TIT, OAT, Oil Pressure, Oil Temperature, Fuel Pressure (requires an upper deck pressure transducer an additional \$195), Hydraulic Pressure, Vacuum, G-Meter, Fuel Level (up to 4 tanks, Fuel Level Sensors not included), Carb Temp or IAT.

### CHOOSE UP TO 8 ADDITIONAL FUNCTIONS:

HP (requires RPM, Manifold and EGT), Engine Time (requires RPM), Tach Time (requires RPM), Flight Timer (requires RPM), Local Time, Zulu Time, Volts, Amps, Carbon Monoxide Detector (additional \$695).



**SHOWN WITH TWIN ARCS**

## PRICING:


### CGR-30C PACKAGE

INCLUDES 6 ANNUNCIATORS TIED TO EXTERNAL SWITCHES

Without EDC: .....	\$ 2,598
With EDC: .....	\$ 3,098

**If the CGR-30C is operating with a CGR-30P in the panel, an EDC will NOT be required.**

# CGR-30 COMBO Package

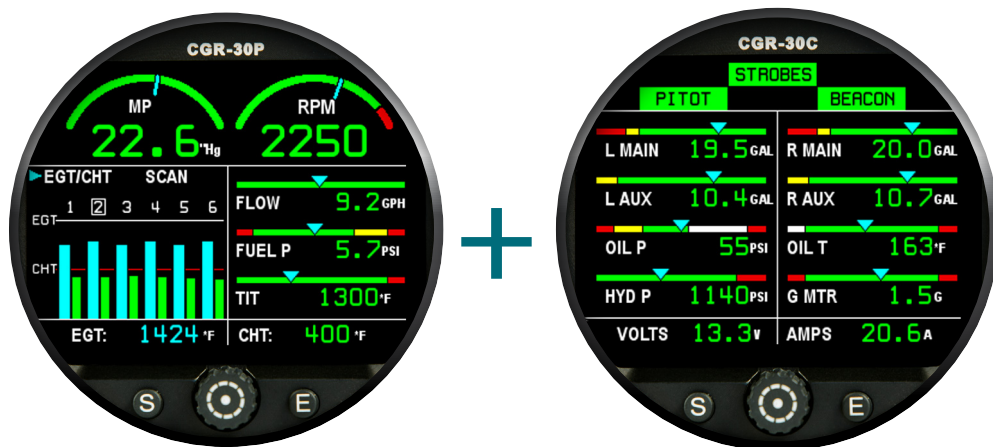

## SPECIFICATIONS:

- Fits standard 3 1/8" holes
- Dimensions: 3.125" x 3.125" x D: 4.45"
- Accuracy: 1/2%. Viewable in sunlight
- Backlit for night operation
- STC'd & TSO'd as Primary Replacements
- Primary Replacement OAT

## CGR-30 COMBO PACKAGE INCLUDES:

### HARDWARE INCLUDED:

- Primary Replacement RPM
- Primary Replacement Manifold Pressure
- Primary Replacement Fuel Level (up to 4)
- Primary Replacement EGT/CHT Bargraph
- Primary Replacement Oil Pressure
- Primary Replacement Oil Temperature
- Primary Replacement Amps
- Primary Replacement OAT
- Primary Replacement Fuel Flow
- Fuel Remaining and Fuel Used
- GPS/Fuel Flow Data
- Engine Time and Tach Time
- Flight Timer
- Local Time and Zulu Time
- Pilot Programmable Checklists

### OPTIONS: (NO CHARGE)

- Primary Replacement Fuel Pressure\*
- Primary Replacement Hydraulic Pressure\*
- Primary Replacement TIT\*
- Primary Replacement Carb Temp or OAT\*
- Second Amps Measurement\*
- On Screen Annunciators
- Return Fuel Flow Transducer (Pressure/Carb)\*
- G-Meter
- Horsepower
- More options may be available
- \*If applicable for your aircraft*

## PRICING:

### CERTIFIED PISTON PACKAGES

4-Cylinder:	\$ 5,698
6-Cylinder:	\$ 6,098
7-Cylinder:	\$ 6,298
9-Cylinder:	\$ 7,098

For Turboprops and Jets, please call (541) 318-6060 for pricing.

### CERTIFIED UPGRADE PACKAGES

4 or 6-Cyl. Upgrade Package with Trade-In Engine Analyzer	\$5,398*
4 or 6-Cyl. Upgrade Package with Trade-In Engine Analyzer + Fuel Flow	\$5,298**

\* Add \$300 core charge, which will be refundable when trade-in Engine Analyzer is received.

\*\*Add \$400 core charge, which will be refundable when trade-in Engine Analyzer & Fuel Flow Instrument is received.

### EXPERIMENTAL COMBO UPGRADE PACKAGES

CGR-30-Combo-Exp-A*: CGR-30 Exp. Upgrade Pkg 4 or 6-Cyl. (Non-Certified) w/ Trade-In Engine Analyzer	\$2,700*
CGR-30-Combo-Exp-AF*: CGR-30 Exp. Upgrade Pkg 4 or 6-Cyl. (Non-Certified) w/ Trade-In Engine Analyzer + Fuel Flow	\$2,600**

\* Add \$300 core charge, which will be refundable when trade-in Engine Analyzer is received.

\*\*Add \$400 core charge, which will be refundable when trade-in Engine Analyzer & Fuel Flow Instrument is received.

## OPTIONS

CO Detector (CO Guardian):	\$ 695
Primary Float Type Replacement Fuel Probes:	\$ 496/ea

# TR-1 for Turboprop & Jet Engine Aircraft



NG



NP



TQ



ITT

Each TR-1 displays a single function. Available: EGT, Fuel Flow, Fuel Level, TAT, OAT, Hydraulic Pressure, Oil Pressure, Oil Temp, Fuel Temp, Volts, Amps, AOA, Vibration, Strain or almost anything that has a signal.

## SPECIFICATIONS:

- Fits 2" standard round hole (MS28042-1A mount) , 4.23" long
- Weight: 0.3 Lbs
- Power: 6 to 55 volts, 0.075 amps @ 28V
- Dimming: Auto (electric eye) and Manual
- Environmental: DO-160G
- TSO: -C43c, -C44c, -C45b, -C47a, -49b, -C55a
- Display: 210° Analog and 4-Digits, all backlit
- Memory: 1,000 hours, RS232 port (Premium only)

## FEATURES:

- Custom faceplate markings
- Built-in warning light (Optional)
- RS-232 input and output port to interface with EECs, FADECs and other devices
- Mapping for accuracy
- Two Open-Collector (pull-down) Pins for controlling external warning lights or props, 0.1 amps max, Optional
- ARINC 429 compatible via the BC-5, Optional

## PRICING:

### STANDARD

**Includes** ..... \$ 1,700

- One-year warranty
- Three-month money-back guarantee
- 8130-3 Airworthiness Approval Tag

**For Non-Agricultural Aircraft, Jets, and Helicopters, please contact EI for pricing.**

### PREMIUM

**Includes** ..... \$ 2,000

- Three-year warranty
- Three-month money-back guarantee
- 1,000+ hours of recording at 1/3 second per record
- Priority service on warranties and orders
- 8130-3 Airworthiness Approval Tag
- Return and get full credit on your TR-1s when you purchase an MVP-50T within one year

**For Non-Agricultural Aircraft, Jets, and Helicopters, please contact E.I. for pricing.**

## TR-1 ACCESSORIES

**P-908:** ..... \$995

EGT 8 Probe Harness for a Garrett TPE 331-1 & -2 Turbine Engine. No STCs.

**FCD-TR-1:** ..... \$600

Bluetooth Field Calibration Device for all TR-1 instruments.

**A-104 Adapter Plate:** ..... \$128

E.I.'s 2" instruments fit perfectly into our 2-1/4" Adapter Plates.





## FP-5L FUEL FLOW / HORSEPOWER

(STC'd and PMA'd)

The FP-5L is a versatile fuel computer. It displays Gallons per Hour, Gallons Used, Gallons Remaining, Time to Empty, Gallons Needed to Destination, % Horsepower and two programmable Low-Fuel Alarms. The FP-5L also has a pressure channel that can be used to monitor Fuel Pressure.

**SPECIFICATIONS:** 2 1/4" Mount. 3.65" Depth. 28 Oz. Kit. Backlit for night operation. Viewable in direct sunlight. Operates from 7.5 to 30 volts at .3 amps.



## NON-PRIMARY FP-5L PACKAGES

**FP-5L Instrument Only:** Instrument Only (no transducers). ..... \$ 496

### FP-5L Without Pressure:

**FP-5L-60-NP:** Includes FT-60 Flow Transducer (for engines up to 350 HP and an engine-driven fuel pump). ..... \$ 648

**FP-5L-90-NP:** Includes FT-90 Flow Transducer (for engines with 350 to 550 HP or without an engine-driven fuel pump). ..... \$ 648

**FP-5L-180-NP:** Fuel Flow w/HP & GPS input/output. Includes High Flow FT-180 Flow Transducer (for aircraft with more than 550 HP). ..... \$ 996

### FP-5L With Pressure:

**FP-5L-60-PSI:** Includes FT-60 Flow Transducer (for engines up to 350 HP and an engine-driven fuel pump) & PSI Transducer. .... \$ 848

**FP-5L-90-PSI:** Includes FT-90 Flow Transducer (for engines with 350 to 550 HP OR without an engine-driven fuel pump) & PSI Transducer. .... \$ 848

**FP-5L-180-PSI:** Fuel Flow w/HP & GPS input/output. Includes High Flow FT-180 Flow Transducer (for aircraft with more than 550 HP). ..... \$ 1,196

## PRIMARY FP-5L PACKAGES - FP-5L configuration worksheet is required.

**FP-5L-HL Instrument Only:** Instrument Only (no transducers). ..... \$ 596

### FP-5L-HL Without Pressure:

**FP-5L-HL-60-NP:** Includes FT-60 Flow Transducer (for engines up to 350 HP and an engine-driven fuel pump). ..... \$ 748

**FP-5L-HL-90-NP:** Includes FT-90 Flow Transducer (for engines with 350 to 550 HP or without an engine-driven fuel pump). ..... \$ 748

**FP-5L-HL-180-NP:** Fuel Flow w/HP & GPS input/output. Includes High Flow FT-180 Flow Transducer (for aircraft with more than 550 HP). ..... \$ 1,096

### FP-5L-HL With Pressure:

**FP-5L-HL-60-PSI:** Includes FT-60 Flow Transducer (for engines up to 350 HP and an engine-driven fuel pump) & PSI Transducer. .... \$ 948

**FP-5L-HL-90-PSI:** Includes FT-90 Flow Transducer (for engines with 350 to 550 HP or without an engine-driven fuel pump) & PSI Transducer. .... \$ 948

**FP-5L-HL-180-PSI:** Fuel Flow w/HP & GPS input/output. Includes High Flow FT-180 Flow Transducer (for aircraft with more than 550 HP or without an engine-driven fuel pump). ..... \$ 1,296

## OPTIONS: May be required for your aircraft

**FFDM-1** Fuel Flow Differential Module (for aircraft with a pressure carburetor). Includes FT-60 or FT-90 flow transducer to measure the returned fuel. Please specify FT-60 or FT-90: ..... \$ 500

**DPIM-1-30** Fuel Pressure Differential Module (for aircraft that measure fuel pressure in reference to the upper deck). Includes 1 PT-30GA pressure transducer to measure the upper deck: ..... \$ 500

## FL-1 AND FL-2 FUEL LEVEL INSTRUMENTS

(Not STC'd. For TC and STC Holders or Experimental Aircraft)

The FL-1 and FL-2 are fuel level instruments featuring an LED analog display and a digital display. The FL-1 is for a single fuel tank while the FL-2 is for two fuel tanks. They can display in gallons (one or one-half gallon increments), pounds or liters. Since the FL-1 and FL-2 do not incorporate any moving parts (needles, bearings, springs, etc.), there is little to go wrong or wear out. Instrument improvements allow for a new, easier and quicker fuel calibration procedure. The procedure also removes any non-linearity in the tanks and sensors. You may use as few as two calibration points or as many as nine. A new programmable Fuel Slosh Stabilization feature has been added to increase user customization.

**SPECIFICATIONS:** 2 1/4" Mount, 3.65" Depth, 10 Oz. Unit, Viewable in direct sunlight, Backlit, Operates from 7.5 to 35 volts at .3 amps.



### ALL PACKAGES (WITHOUT PROBES) - \$600

**FL-1CA or FL-2CA:** This model was designed to be used with E.I.'s Capacitive Fuel Level Probe (P-300C) from 6" to 20' long. A P-300C/4 Module must be used for probes 6" to 4' long.

**FL-1RA-12 or FL-2RA-12:** This model was designed to be used on a 12-volt system with a resistive fuel level sensor. The fuel level sensor's resistance may increase or decrease as fuel is added to the tank and the maximum resistance must be between 90 and 270 ohms.

**FL-1RA-24 or FL-2RA-24:** This model was designed to be used on a 24-volt system with a resistive fuel level sensor. The fuel level sensor's resistance may increase or decrease as fuel is added to the tank and the maximum resistance must be between 90 and 270 ohms.

**FL-2M:** This model was designed to be used with E.I.'s Magnetic Float Sensor (P-300M). The P-300M is an accurate replacement for a resistive fuel level sensor.



**Replace your unreliable fuel probes with our P-300M Magnetic Probe or P-300C Capacitive Probe.**  
 (See our ACCESSORIES section on page 31 for more details.)

The diagram shows two types of fuel probes. On the left is the P-300M Magnetic Probe, which consists of a black cylindrical sensor head with a thin metal rod extending from it, and a circular base with a fuel inlet. On the right is the P-300C Capacitive Probe, which features a black cylindrical sensor head connected to a white cable. The cable is attached to a metal fitting with a 1/8" or 1/4" NPT thread. This fitting is connected to a 3/16" tube that can be bent or cut to length. The length is measured from the point where the cable enters the fitting. An 'Interface Module IMC-xx (\$38)' is also shown connected to the cable.

**P-300M MAGNETIC PROBE**      **P-300C CAPACITIVE PROBE**

## R-1 RPM TACHOMETER

(TSO'd and STC'd as Primary Replacement)

Displays an accurate RPM measurement in digital and analog format. Proprietary algorithms ensure stable yet lightening-quick responses.

**INCLUDES:** Instrument, wire harness, RC-1 Cap, and an A-102 Adapter plate.

**SPECIFICATIONS:** 2 1/4" Mount. 3.65" Depth. Viewable in direct and indirect sunlight. Backlit for night operation. Operates from 7.5 to 30 volts at .3 amps. Instruments may be marked with labels on the faceplate rather than silkscreened to signify limit markings for your aircraft.

**PRICE:** ..... \$700 Order **MUST** specify range markings.



## OPT-1 OIL PRESSURE AND TEMPERATURE

(TSO'd and STC'd as Primary Replacement)

Displays accurate Oil Pressure and Temperature readings. Easily see readings on a large LCD display along with an LED arc for quick-glance analysis.

**INCLUDES:** Instrument Temp Probe, Pressure Transducer and Wire Harness.

**SPECIFICATIONS:** 2 1/4" Mount. 3.65" Depth. Viewable in direct and indirect sunlight. Backlit for night operation. Operates from 7.5 to 30 volts at .3 amps. Instruments may be marked with labels on the faceplate rather than silkscreened to signify limit markings for your aircraft. An A-102 Adapter is available to fill a 3 1/8" hole for \$28

**PRICE:** ..... \$760 Order **MUST** specify range markings.



## M-1 MANIFOLD PRESSURE

(TSO'd and STC'd as Primary Replacement)


Displays precise Manifold Pressure in both digital and analog format. The LED Arc provides a quick reference of the Manifold Pressure operation.

**INCLUDES:** Instrument and Wire Harness.

**SPECIFICATIONS:** 2 1/4" Mount. 3.65" Depth. Viewable in direct and indirect sunlight. Backlit for night operation. Operates from 7.5 to 30 volts at .3 amps. Instruments may be marked with labels on the faceplate rather than silkscreened to signify limit markings for your aircraft. An A-102 Adapter is available to fill a 3 1/8" hole for \$28

**PRICE:** ..... \$700 Order **MUST** specify range markings.



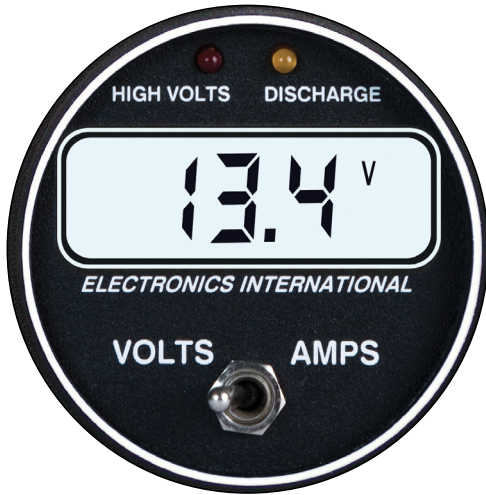

## VA-1A VOLTS AND AMPS

(STC'd, and PMA'd)

Provides precision volts and amps readings. Offers both a "High Volts" and a "Discharge" warning light. Runs on a 12 or 24-volt system. This model comes with an internal S-50 shunt.

**PRICE:** ..... \$500

**VA-1A-XX** The VA-1A-xx can be calibrated to match any aircraft external shunt (i.e. 50 amp, 50mV external shunt must use a VA-1A-50).

**PRICE:** ..... \$500 Order must specify shunt value. (shunt sold separately)

**SPECIFICATIONS:** Accuracy: 1%. 2 1/4" Mount. 2.5" Depth. 9 Oz. Unit. Viewable in direct and indirect sunlight. Backlit for night operation. Operates from 7.0 to 40 volts at .1 amp.



**RSVA-3** Remote Switch used to monitor the Left and Right Alternator and Battery Current for Twins. To be used with any external shunt unit. Body 1" x 1" x 1.5" depth. Front Panel 2" x 1.15." 3 Oz. Unit. STC'd, PMA'd.

**PRICE:** ..... \$98

**S-50** 50 amp, 50mV (100 amp short burst capability). External Shunt. To be used with a VA-1A-50. Size 2" x 1.2" x 1.7" height. 3.5 Oz. Unit.

**PRICE:** ..... \$48



**S-300** 300 amp External Shunt. Used with a VA-1A-300. Size 3.25" x 1.75" x 1.75" height. 11.5 Oz. Unit.

**PRICE:** ..... \$60



## SC-5 SUPER CLOCK

(No STC required.)

The SC-5 is a fully functional, panel-mounted aircraft clock. Displays Local Time, Zulu Time, 12 & 24-hour formats and an engine timer. Has Up and Down timers with programmable alarms. The instrument runs off a 10-year lithium battery that keeps the clock running even if the aircraft battery is removed.

**INCLUDES:** SC-5 and wire harness.

**SPECIFICATIONS:** 2 1/4" Mount. 3.65" Depth. 10 Oz. Unit. Viewable in direct and indirect sunlight. Backlit for night operation. Operates from 7.5 to 35 volts at .3 amps.

**PRICE:** ..... \$440



## USB-6A - SMART CHARGER

**PRICE:** ..... \$220



**SPECIFICATIONS:** Mounts in a 2 1/4" hole. Operates from 7.5 to 35 volts, .1 amp idle, 3 amps max.

Our USB-6A Smart Charger has two smart device charging ports and three data passthrough ports. Compatible with our CGR-30 instrument, the three data passthrough ports allow you to upload and download data from our CGR-30 instruments.

It comes with a USB charging analyzer which displays the charging voltage and current.



## E-1 OR C-1 SINGLE-CHANNEL EGT OR CHT (STC'd, TSO'd and PMA'd)

The E-1 is a single-channel EGT instrument and the C-1 is a single-channel CHT instrument.

**SPECIFICATIONS:** Both instruments are 2 1/4" mount, 2.5" depth and 7 ounces. Sunlight viewable and backlit for night operation.

**INCLUDES:** Unit, 1 ea 8' cable, 1 probe, all wires and connectors.

**PRICE:** ..... \$428



## E-1P, T-1P OR C-1P PRIMARY REPLACEMENT SINGLE CHANNEL (STC'd, TSO'd and PMA'd)

Primary replacement single-channel EGT, TIT or CHT instruments with an Over-Temp Light.

**SPECIFICATIONS:** Both instruments are 2 1/4" mount, 2.5" depth and 7 ounces. Sunlight viewable and backlit for night operation.

**INCLUDES:** Unit, 1 ea 8' cable, 1 probe, all wires and connectors.

**PRICE:** ..... \$492 (Order **MUST** specify Over-Temp Limit and TIT probe type, if applicable)



## EC-1 SINGLE-CHANNEL EGT/CHT (STC'd, TSO'd and PMA'd)

Can monitor 1 EGT and 1 CHT. Easily switch between your readings with the front-mounted switch.

**SPECIFICATIONS:** Both instruments are 2 1/4" mount, 2.5" depth and 7 ounces. Sunlight viewable and backlit for night operation.

**INCLUDES:** Unit, 2 ea 8' cables, 1 ea EGT probe and 1 CHT probe

**PRICE:** ..... \$580



## E-6 OR C-6 SIX-CHANNEL EGT OR CHT (STC'd, TSO'd and PMA'd)

This unit allows you to monitor 6 channels of EGT or CHT with a six-position switch.

**SPECIFICATIONS:** Both instruments are 2 1/4" mount, 2.5" depth and 8 ounces. Sunlight viewable and backlit for night operation.

**INCLUDES:** Unit, 6 ea 8' cables, 6 probes and all wires and connectors.

**PRICE:** ..... \$1,000



## E-4 OR C-4 FOUR-CHANNEL EGT OR CHT (STC'd, TSO'd and PMA'd)

This unit allows you to monitor 4 channels of EGT or CHT with a four-position switch.

**SPECIFICATIONS:** Both instruments are 2 1/4" mount, 2.5" depth and 8 ounces. Sunlight viewable and backlit for night operation.

**INCLUDES:** Unit, 4 ea 8' cables, 4 probes and all wires and connectors.

**PRICE:** ..... \$880



## MODEL A-1 OAT or CARB. TEMP

(STC'd, TSO'd and PMA'd)

Order the instrument to display OAT or Carb. Temp. with Ice Zone warning light.

**SPECIFICATIONS:** 2 1/4" Mount

**INCLUDES:** Unit, 1 ea 8' cable and 1 OAT probe.

**PRICE:** ..... \$428



## MODEL CA-1 CARB. TEMP & OAT

(STC'd, TSO'd and PMA'd)

Carb. Temp and OAT Instrument with Ice Zone Warning Light.

**SPECIFICATIONS:** 2 1/4" Mount

**INCLUDES:** Unit, 2 ea 8' cables, 1 Carb. Temp probe and 1 OAT probe.

**PRICE:** ..... \$532



## MODEL EAC-1 EGT, CHT & OAT

(STC'd, TSO'd and PMA'd)

EGT/OAT/CHT Instrument with Ice Zone Warning Light.

**SPECIFICATIONS:** 2 1/4" Mount

**INCLUDES:** Unit, 3 ea 8' cables, 1 EGT probe, 1 OAT probe and 1 CHT probe.

**PRICE:** ..... \$648

## Remote Switches

### RS-4-1S (STC'd and PMA'd)

Upgrades a single temperature instrument to read four channels of EGT or CHT. **Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, front panel 2" x 1.15"

**INCLUDES:** Unit, 3 ea 8' cables, 3 EGT or 3 CHT probes.

**PRICE:** ..... \$500

### RS-4-2S (STC'd and PMA'd)

Upgrades a dual temperature instrument to read four channels of EGT and CHT. **Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, Front Panel 2" x 1.15"

**INCLUDES:** Unit, 6 ea 8' cables, 3 EGT probes and 3 CHT probes.

**PRICE:** ..... \$700

### RS-6-1S (STC'd and PMA'd)

Upgrades a single temperature instrument to read six channels of EGT or CHT. **Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, front panel 2" x 1.15"

**INCLUDES:** Unit, 5 ea 8' cables, 5 probes, 5 EGT or 5 CHT probes.

**PRICE:** ..... \$648

### RS-6-2S (STC'd and PMA'd)

Upgrades a single temperature instrument to read six channels of EGT and CHT. **Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, front panel 2" x 1.15"

**INCLUDES:** Unit, 10 ea 8' cables, 5 EGT probes and 5 CHT probes.

**PRICE:** ..... \$980



# Remote Switches

## RS-8-1S (STC'd and PMA'd)

Upgrades a single temperature instrument to read eight channels of EGT or CHT.

**Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, front panel 2" x 1.15"

**INCLUDES:** Unit, 7 ea 8' cables, 7 EGT or 7 CHT probes.

**PRICE:** ..... \$800



## RS-12-1S (STC'd and PMA'd)

Upgrades a single temperature instrument to read twelve channels of EGT or CHT.

**Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, front panel 2" x 1.15"

**INCLUDES:** Unit, 11 ea 8' cables, 11 EGT or 11 CHT probes.

**PRICE:** ..... \$1,100



## RS-5-1PS (STC'd and PMA'd)

Upgrades any primary TIT/CHT unit to read four channels of EGT or CHT

**Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, front panel 2" x 1.15"

**INCLUDES:** Unit, 4 ea 8' cables, 4 EGT or 4 CHT probes.

**PRICE:** ..... \$800

**OPTION:** Add \$40 for 4 P-110F FAST Response EGT probes.



## RS-5-2PS (STC'd and PMA'd)

Upgrades any primary TIT/CHT unit to read four channels of EGT and CHT.

**Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, front panel 2" x 1.15"

**INCLUDES:** Unit, 8 ea 8' cables, 4 EGT probes and 4 CHT probes.

**PRICE:** ..... \$1,100

**OPTION:** Add \$40 for 4 P-110F FAST Response EGT probes.

## RS-7-1PS (STC'd and PMA'd)

Upgrades any primary TIT/CHT unit to read six channels of EGT or CHT.

**Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, Front Panel 2" x 1.15"

**INCLUDES:** Unit, 6 ea 8' cables, 6 EGT or 6 CHT probes.

**PRICE:** ..... \$800 Order must specify either EGT or CHT probes.

**OPTION:** Add \$60 for 6 P-110F FAST Response EGT probes.



## RS-7-2PS (STC'd and PMA'd)

Upgrades any primary TIT/CHT unit to read six channels of EGT and CHT.

**Lead Time:** Usually ships within 3 - 5 days

**SPECIFICATIONS:** Body 1" x 1" x 1.5" depth, Front Panel 2" x 1.15"

**INCLUDES:** Unit, 12 ea 8' cables, 6 EGT probes and 6 CHT probes.

**PRICE:** ..... \$1,100

**OPTION:** Add \$60 for 6 P-110F FAST Response EGT probes.

**Remote Switch Prices without Probes or Cables:**

**RS-4-1, RS6-1:** \$148 (No Dealer Discounts)

**RS-4-2, RS-6-2, RS-7-1, RS-7-2, RS-8-1, RS-12-1:** \$184 (No Dealer Discounts)



## E-2 OR C-2 DUAL-CHANNEL EGT OR CHT

(STC'd, TSO'd, PMA'd)

**SPECIFICATIONS:** 2 1/4" Mount, 2.5" Depth and 24 oz. kit. Accurate to 1/2% with 1 degree resolution.

**INCLUDES:** Unit, 2 ea 20' cables, 2 EGT or 2 CHT probes and all wires and connectors.

**PRICE:** ..... \$820




## EC-2 EGT AND CHT FOR LEFT AND RIGHT ENGINE

(STC'd, TSO'd, PMA'd)

**SPECIFICATIONS:** 2 1/4" Mount, 2.5" Depth and 2.5 lb kit. Accurate to 1/2% with a 1 degree resolution. Operates from 7.5 to 35 volts at .1 amp.

**INCLUDES:** Unit, 4 ea 20' cables, 2 EGT probes and 2 CHT probes.

**PRICE:** ..... \$1,000

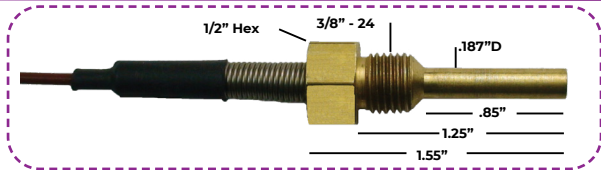

**P-100 - CHT PROBE**

Screw-in Type, standard with most kits. Can be used in a pressure environment. 700°F Max.


PRICE: ..... \$128



**P-101 - CHT PROBE**

Military Bayonet Type, 1/4 turn locking for quick removal. To be used with the A-101 Adapter, 700°F Max.


PRICE: ..... \$128



**A-101 - CHT ADAPTER**

3/8" - 24, To be used with the P-101 CHT Probe.

PRICE: ..... \$20

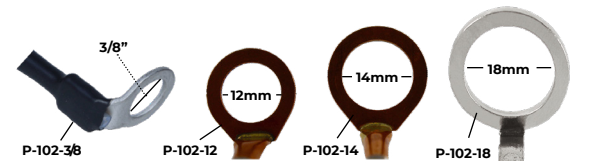


**P-102-18:** CHT probe, 18 mm. Gasket Type, 700°F Max.

**P-102-14:** CHT probe, 14 mm Gasket Type, 700°F Max.

**P-102-12:** CHT probe, 12 mm Gasket Type, 700°F Max.

**P-102-3/8:** CHT probe, 3/8" Piggy-Back Gasket Type, 700°F Max.

PRICE: ..... \$128

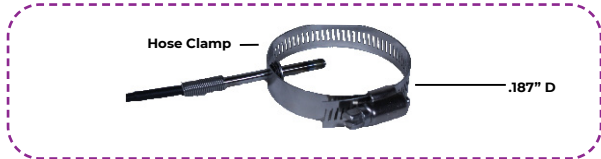

**P-110-R - ROBUST EGT/TIT PROBE**

Hose clamp type, used with 13/64" hole. Optional with most kits. Weight: 1.6 oz.

PRICE: ..... \$128



**P-110-F - FAST RESPONSE EGT/TIT PROBE**

Hose clamp type, used with 5/32" hole. Standard with most kits. Weight: 1.3 oz.

PRICE: ..... \$128



**P-110-R/F - EGT/TIT PROBE HARDWARE KIT**

Can be used with either the P-110-R probe or the P-110-F probe.

PRICE: ..... \$28




**P-111: TIT PROBE**, 1/8" NPT, with adjustable depth.

**P-112: TIT PROBE**, 7/16" - 20, with adjustable depth.

**P-114: TIT PROBE**, 1/4" NPT, with adjustable depth.


PRICE: ..... \$140

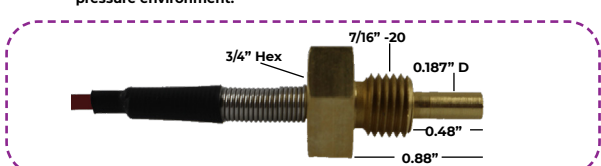

**P-120-PAI TEMP PROBE**

Monitors oil temperature on PT-6 and other engine types. Can be used in pressure environments with correct seal. Designed to be used with an O-ring.


PRICE: ..... \$220

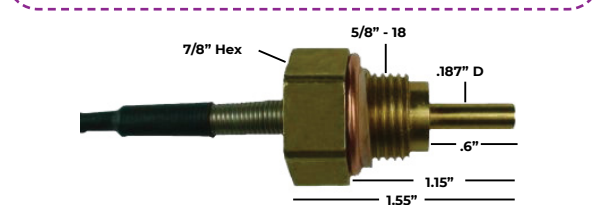

**P-120 - OIL TEMP PROBE**

Can be used in a pressure environment, 700°F Max. Weight: 2.5 oz.

PRICE: ..... \$128

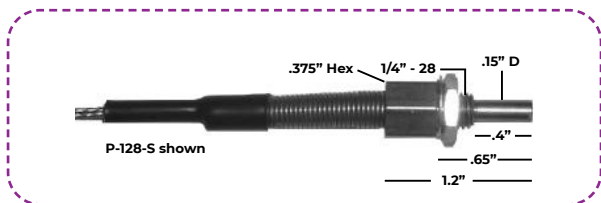


**P-128 - OAT/CARB TEMP PROBE**

**FAST** Response Exposed Tip, uses a precision connector, 700°F Max.

**P-128-S - SEALED TIP TEMP PROBE**

For use in pressure environments, uses a precision connector, 700°F Max.

PRICE: ..... \$128



**P-104 - UNIVERSAL PROBE**

Used to measure surface temperatures, 700°F Max.

PRICE: ..... \$128

## AL-1(X) - CHROME ANNUNCIATOR LIGHT

**Not STC'd (Normally installed as a minor alteration.)**

(X) = "R" (Red), "Y" (Yellow), "B" (Blue), "G" (Green) or "O" (Orange). The AL-1 makes an excellent indicator light for displaying boost pump on, gear status, power on, flags, etc. Also, it can be used as a remote warning light for any E.I. instrument featuring an external warning line. The AL-1 is more attractive, operates on less power and is smaller than the old-fashioned indicator lights. The AL-1 has a service life of over 1000 times that of incandescent bulbs.

**SPECIFICATIONS:** Mounts in a 5/16" hole.

**Size:** .4" diameter x 1" depth. Operates on a 12 or 24-volt system. Comes with 32" leads.

**PRICE:** ..... \$32



## ATG-1 - ANNUNCIATOR TONE GENERATOR

**Not STC'd (Normally installed as a minor alteration.)**

This unit generates a 4.7 KHZ tone when an out-of-limit condition occurs. The Annunciator Tone Generator may be connected to one or more E.I. Instruments featuring a warning light (C-1P, T-1P, EC-1P, R-1, M-1, OPT-1, FP-5L, etc.). The ATG-1 comes with an on-off toggle switch. It mounts under the instrument panel using wire ties.

**SIZE:** 1.3" diameter x 1" depth. Operates on a 12 or 24-volt system.


**PRICE:** .....\$40



## FFDM-1 - FUEL FLOW DIFFERENTIAL MODULE

**PRICE:** .....\$500

Used with our FP-5 or FP-5L to accommodate a pressure carburetor with a fuel return line back to the fuel tank. Please specify FT-60, FT-90 or FT-180 Flow Transducer. This should be the same type of transducer that was installed with your FP-5 or FP-5L.

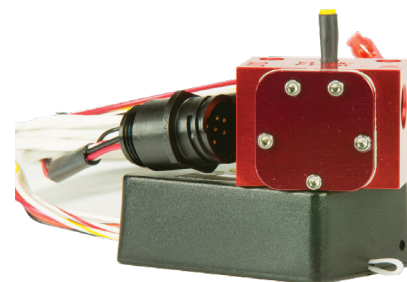

## USB-6A - SMART CHARGER

**PRICE:** ..... \$220

**SPECIFICATIONS:** Mounts in a 2 1/4" hole. Operates from 7.5 to 35 volts, .1 amp idle, 3 amps max.

Our USB-6A Smart Charger has two smart device charging ports and three data passthrough ports. Compatible with our CGR-30 instrument, the three data passthrough ports allow you to upload and download data from our CGR-30 instruments.

It also comes with a USB charging analyzer which displays the charging voltage and current.



## FT-60 - FUEL FLOW TRANSDUCER (RED CUBE)

**PRICE:** ..... \$296

To be used with engine-driven fuel pumps only, and up to 350 HP engines. Red anodized aluminum body, 1/4" female NPT, .6 to 70+ GPH, .6 PSI drop at 30 GPH, 2.3 PSI drop at 60 GPH, K-Factor approximately 68,000, 5.3 Oz.

## FT-90 - FUEL FLOW TRANSDUCER (GOLD CUBE)

**PRICE:** ..... \$296

For 350 to 550 HP engines, or gravity-feed engines. Gold anodized aluminum, 1/4" female NPT, 3 to 125+ GPH, .05 PSI drop at 20 GPH, .2 PSI drop at 40 GPH, K-Factor approximately 33,800, 5.3 Oz.

## FT-180 - FUEL FLOW TRANSDUCER (BLACK CUBE)

**PRICE:** ..... \$496

Black anodized aluminum body, 1/4" female NPT, supplied with additional #8 male flare fittings, 5 to 250+ GPH, .23 PSI drop at 60 GPH, .92 PSI drop at 120 GPH, K-Factor approximately 22,400, 5.3 Oz. The EI FT-180 (Black Cube) Flow Transducer does not require the IU-1 Foxboro Interface Unit.



## PT-30GA - PRESSURE TRANSDUCER

**PRICE:** ..... \$248

1/8" NPT Male, 0 to 40 PSI, Max, Over Pressure 90 PSI, Burst Pressure 120 PSI, Shock 100g, Material 316L SS, 8 oz.

## PT-100GA - PRESSURE TRANSDUCER

**PRICE:** ..... \$248

1/8" NPT Male, 0 to 120 PSI, Max, Over Pressure 300 PSI, Burst Pressure 400 PSI, Shock 100g, Material 316L SS, 8 oz.

## PT-100GA-T - TORQUE PRESSURE TRANSDUCER

**PRICE:** ..... \$380

1/8" NPT Male, 0 to 120 PSI, Max, Over Pressure 300 PSI, Burst Pressure 400 PSI, Shock 100g, Material 316L SS, 8 oz.

## PT-300GA - PRESSURE TRANSDUCER

**PRICE:** ..... \$248

1/8" NPT Male, 0 to 300 PSI, Max, Over Pressure 900 PSI, Burst Pressure 1200 PSI, Shock 100g, Material 316L SS, 8 oz.

## PT-3000S - PRESSURE TRANSDUCER

**PRICE:** ..... \$380

1/8" NPT Male, 0 to 3000 PSI, Max, Over Pressure 9,000 PSI, Burst Pressure 10,000 PSI, Shock 100g, Material 316L SS, 8 oz.



## IU-1- FOXBORO INTERFACE UNIT


**PRICE:** ..... \$228

Electronics in a lumpy cable used to interface a Foxboro or Flow Technologies Transducer to the FP- 5(L). K-Factor for a Foxboro Transducer is approx. 33,800. The IU-1 is not needed for E.I.'s FT-180 (Black Cube) Flow Transducer.




## A-102 - ADAPTER PLATE - PRICE: ..... \$28

E.I.'s 2 1/4" instruments fit perfectly into our 3-1/8" Adapter Plates, which are black powder-coated aluminum to match our instruments.

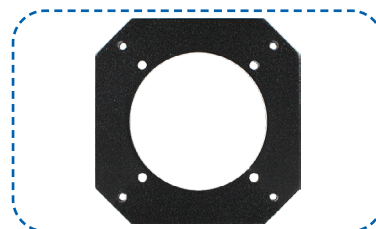

## A-104 - ADAPTER PLATE - PRICE: ..... \$128

E.I.'s 2" instruments fit perfectly into our 2 1/4" Adapter Plates, which are anodized aluminum to match our instruments.

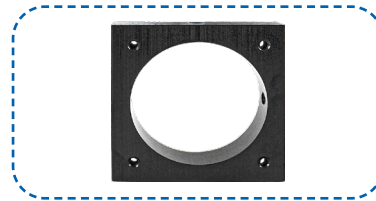

## TYPE K EXTENSION CABLES

Type K Extension Cables are used to connect a temperature probe to an instrument (see connector options below).

Available Lengths	PRICE
8' Extension Cable .....	\$56
12' Extension Cable .....	\$72
20' Extension Cable .....	\$100

### CONNECTOR OPTIONS:

#### XO EXTENSION CABLE (PART NUMBERS: XO-8', XO-12', XO-20')

Extension Cable with overlap (OLC-2) connectors.

#### XCO EXTENSION CABLE (PART NUMBERS: XCO-8', XCO-12', XCO-20')

Extension Cable with overlap (OLC-2) connectors for the probe side, **cannon plug pins** on the instrument side. Commonly used on E.I. instruments: UBG-16.

#### XDO EXTENSION CABLE (PART NUMBERS: XDO-8', XDO-12', XDO-20')

Extension Cable with Overlap (OLC-2) connectors for the probe side, **D-sub pins** on the instrument side. Commonly used on E.I. instruments: EDC-33x (MVP-50 and CGR-30).



XCO Extension Cable with OLC-2 connectors shown above.

## CP-1 - LED INTENSITY CONTROL POT & ELECTRONICS

PRICE: ..... \$60

Controls the intensity of the UBG-16 (Plasma Display), green LEDs on R-1, M-1, OPT-1, FL-2, FP-5(L) and other E.I. instruments. This unit can be connected to any one or all of these instruments at the same time. It provides linear control of the intensity of the green LEDs for low ambient light or night operation. Mounts in a 1/4" hole. Operates on a 12 or 24-volt system.

**Note:** The CP-1 is a low current, high impedance control pot with offsets and gains designed to control the intensity of E.I.'s LEDs & plasma displays only. **Not appropriate for other applications.**



## S-50 SHUNT (PMA'D)

PRICE: ..... \$48


50 amp, 50mV (100 amp capability) external shunt. To be used with a VA-1A-50. Size 2" x 1.2" x 1.7" height. 3.5 oz. unit.



## S-300 SHUNT (PMA'D)

PRICE: ..... \$60

300 amp external shunt. To be used with a VA-1A-300, Size 3.25" x 1.75" x 1.75" height. 11.5 oz. unit.

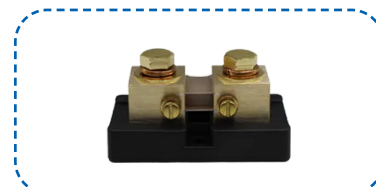

## FIELD TEST DEVICES

PRICE: .....\$120

Field test devices provide an excellent way of verifying and troubleshooting system wiring and instrument operation for various E.I. instruments.

### FCD-FF: FUEL FLOW SIGNAL

Outputs a variable fuel flow signal (50 Hz to 350 Hz, 9V square wave).

### FCD-FP: FUEL/OIL PRESSURE SIGNAL

Outputs a variable pressure signal (0 to 100+ PSI, 0-50 mV).

### FCD-RPM: RPM FIELD SIGNAL


Outputs a variable RPM signal (800 to 2800 RPM, 40 to 140Hz, 18V pulse).

### FCD-CFL: CAPACITIVE FUEL LEVEL SIGNAL

Outputs a variable capacitive fuel level signal (300 Hz to 5 kHz, 9V square wave).

### FCD-RFL: RESISTIVE FUEL LEVEL SIGNAL

Outputs a variable resistive (0-250 ohms) fuel level signal.

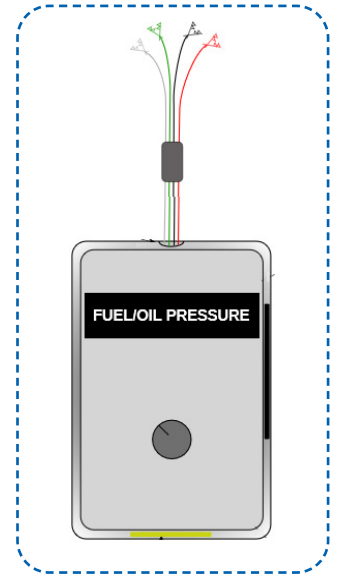

## NIST TRACEABLE FIELD CALIBRATION DEVICES FOR E.I. TURBOPROP INSTRUMENTS

PRICE: ..... \$340

The following Field Calibration Devices (FCDs) provide a calibrated signal that may be used to verify the calibration of a given E.I. instrument. This can be useful when performing FAA flight tests or engine performance verification runs. The FCDs are traceable to NIST and come with calibration paperwork.

### FCD-T-NIST: TEMPERATURE SIGNAL


Outputs an NIST calibrated temperature signal around 778°C (1400°F). May be used to verify calibration of any Electronics International ITT, TOT, TIT, CHT, Oil Temp or other temperature instrument.

### FCD-N1/N2-NIST: TACH GENERATOR SIGNAL

Outputs an NIST calibrated Tach Generator signal at 4200 RPM (70Hz). May be used to verify calibration of any Electronics International N1 or N2 instrument.

### FCD-PRESS-NIST: PRESSURE SIGNAL


Outputs an NIST calibrated pressure signal that simulates a PT-30GA, PT-100GA, PT-300GA and PT-3000S pressure transducer. May be used to verify calibration of any Electronics International Torque, Oil Press, Fuel Press, Hyd Press or other pressure instrument that uses a listed transducer. This unit tests the instrument's pressure channel, not the pressure transducer.

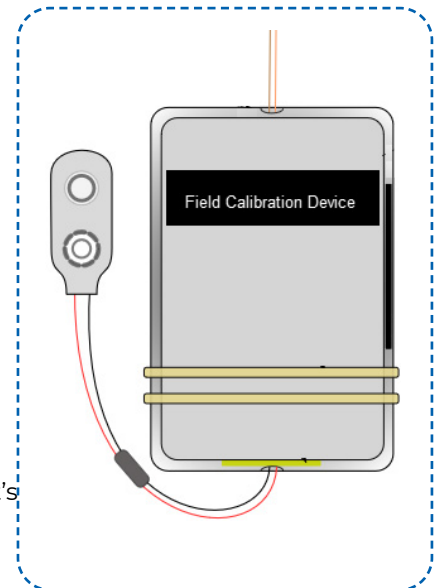

## BLUETOOTH FIELD CALIBRATION DEVICE FOR E.I. TR-1 INSTRUMENTS [FCD-TR-1]

PRICE: ..... \$600

Save time and money with E.I.'s Bluetooth Field Calibration Device designed to allow wireless calibration of our TR-1 instruments as well as wireless data retrieval. Calibrate your instrument or fleet of instruments with one FCD-TR-1 device.




## P-300C: CAPACITIVE FUEL LEVEL PROBE WITH ACCESSORIES

The P-300C is assembled from a 3/4" aluminum pipe with an aluminum center electrode and a 3/4" NPT boss attached to one end. The electronics (P-300C Interface Module) are located externally from the probe. The probe was designed to fit in a 3/4" NPT. Coupler and guides (included with the probe) are intended to be molded into a fiberglass fuel tank. You may wish to use other mounting methods appropriate for your fuel tanks. The probes may be ordered from 6" to 20' in length. A P-300C/4 Divide by 4 Interface Module will be included at no charge for probe lengths that require one. Ordering the correct length is **recommended**, however, you may cut the probes to a shorter length than ordered. Call E.I. for cutting instructions. Probes over 8' may incur additional shipping charges.

**PRICE:** ..... \$500, + additional packaging and shipping charges due to length.

**(Specify Length 6" to 20')** Please allow a minimum of 3 weeks for your order to be shipped.

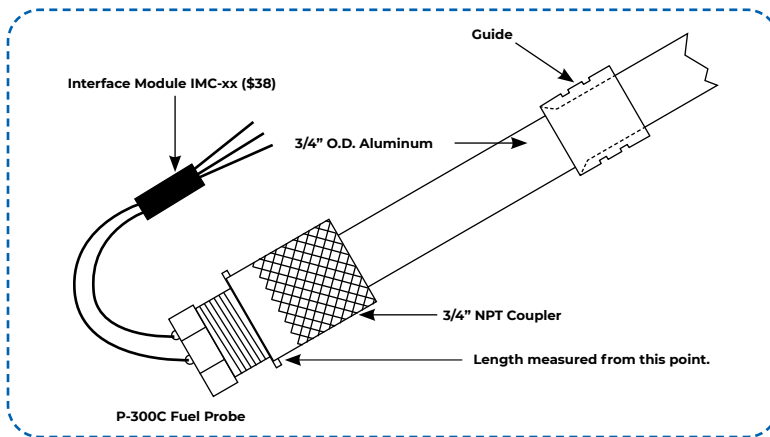

### P-300C-MINI-1/8:

**1/8" NPT CAPACITIVE FUEL LEVEL PROBE**


### P-300C-MINI-1/4:

**1/4" NPT CAPACITIVE FUEL LEVEL PROBE**

The P-300C-Mini is assembled from a 3/16" stainless steel tube with an insulated wire as the center electrode and a 1/8" NPT or 1/4" NPT boss attached to one end. The electronics (P-300C-Mini Interface Module) are located externally from the probe. The probe may be bent or cut to length in the field. The probe can be ordered from 2" to 72" in length. A P-300C/4 Divide by 4 Interface Module will be included at no charge for probe lengths that require one. Ordering the correct length is **recommended**.

**PRICE:** ..... \$376, + additional packaging and shipping charges due to length.

(Specify Length 2" to 72") **Please allow a minimum of 3 weeks for your order to be shipped.**

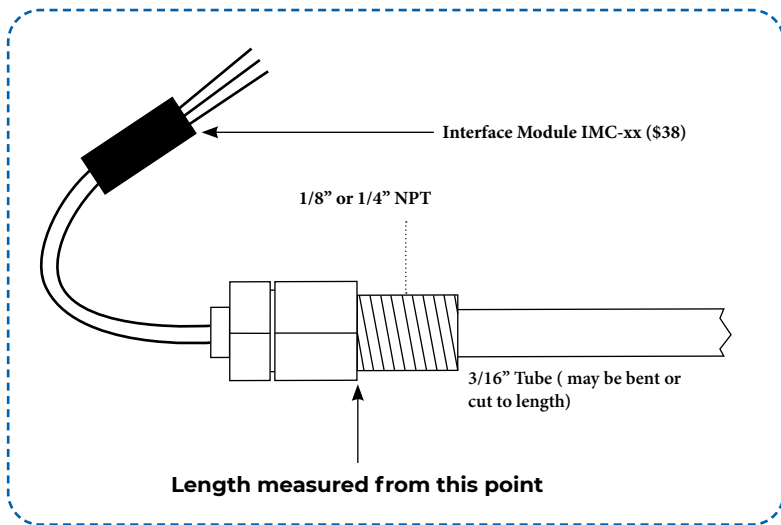

## P-300M MAGNETIC FLOAT SENSOR

The P-300M is a TSO'd fuel level sensor designed by E.I. to replace a resistive sensor. The P-300M works off magnetics and is an accurate and reliable sensor. It is not affected by vibration, corrosion, wear, varnish buildup, poor wiper tension or any of the many other problems affecting resistive sensors. The P-300M will **only** work with E.I. instruments. The float travel must be specified. If an existing sensor is to be replaced, ship your old sensor to E.I. to allow for proper configuration.

**PRICE:** ..... \$540

Add \$375 if custom plate is needed (one-time charge).



## CGR-30 EXPERIMENTAL PACKAGES



### SPECIFICATIONS:

Fits in a standard 3 1/8" Hole.

### Dimensions:

3.125" x 3.125" x 4.45" depth.

### Accuracy:

1/2%.  
Viewable in direct and indirect sunlight. Backlit for night operation.



**CGR-30P:** This non-certified instrument can replace your aircraft's tachometer and many of your existing instruments and functions. Our experimental package gives you tremendous flexibility. To learn more about the CGR-30P, and all that it has to offer, see pages 11 - 12.

**CGR-30C:** This non-certified instrument can replace up to 16 instruments including Oil Temperature/Pressure, Fuel Pressure, even Fuel Level. You can potentially consolidate your entire instrument cluster. To learn more about our CGR-30C and the versatility it has to offer, see page 14.

### PRICING

<b>CGR-30P-4-Exp:</b> CGR-30P Experimental Package 4-Cyl (Non-Certified)	.....	\$ 2,400
<b>CGR-30P-6-Exp:</b> CGR-30P Experimental Package 6-Cyl (Non-Certified)	.....	\$ 2,600
<b>CGR-30P-Exp-A*:</b> CGR-30P Experimental Upgrade Package 4/6-Cyl (Non-Certified)	.....	\$ 2,000
<b>CGR-30P-Exp-AF**:</b> CGR-30P Experimental Upgrade Package 4/6-Cyl (Non-Certified)	.....	\$ 1,900
<b>CGR-30-Combo-Exp-A*:</b> CGR-30P Combo Experimental Upgrade Package 4/6-Cyl (Non-Certified)	.....	\$ 2,700
<b>CGR-30-Combo-Exp-AF**:</b> CGR-30P Combo Experimental Upgrade Package 4/6-Cyl (Non-Certified)	.....	\$ 2,600

\* Add \$300 core charge, which will be refundable when trade-in instrument is received.

\*\* Add \$300 core charge, which will be refundable when trade-in instrument is received.

## MVP-50P EXPERIMENTAL PACKAGES



**MVP-50P:** The non-certified MVP-50P allows pilots to accurately monitor dozens of engine and system parameters, program redline limits, set up custom inputs, create interactive checklists, store general flight information, build flight plans, record and review pertinent data from every flight, and so much more. Our MVP experimental package empowers you with exceptional flexibility, letting you tailor the settings on this instrument to meet your specific goals for flying an aircraft safely and with confidence. To learn more about included hardware, all available functions, options and accessories, please see pages 5 - 7 in this Price List Catalog.

**SPECIFICATIONS:** 5.52" x 5.16" x 1.8" depth. Viewable in direct and indirect sunlight. Backlit for night operation.

### PRICING

<b>MVP-50P-4:</b> MVP-50P Experimental Package 4-Cylinder Package	.....	\$ 6,000
<b>MVP-50P-6:</b> MVP-50P Experimental Package 6-Cylinder Package	.....	\$ 6,500

---

**This Page Intentionally Left Blank**

Providing Superior Products and  
Exceptional Customer Service Since 1979



***Electronics***  
***International Inc.***