

# Tachometer

## R-1

(Primary Replacement Instrument)

### Operating and Installation Instructions

OI 0517911 Rev. C\*\*\*\*\*


**You must read this manual before installing or operating the instrument. This manual contains warranty and other information that may affect your decision to install this product and/or the safety of your aircraft.**



S/N: \_\_\_\_\_



## ***Electronics International Inc.***

63296 Powell Butte Hwy • Bend, OR 97701 • (541) 318-6060 • iFlyEi.com. 

**Blank Page**

# 1. Important Notice: MUST READ!

**If you think it is not important to read this manual, you're wrong! This manual contains important installation information that may affect the safety of your aircraft, delay your installation or affect the operation of your instrument. You **MUST** read this manual prior to installing your instrument. Any deviation from these installation instructions is the sole responsibility of the installer/pilot and may render the STC invalid.**

Check that the instrument make and model marked on the side of the instrument and on the invoice are correct before starting the installation. A R-1-6 is used on a 6-cylinder engine and a R-1-4 is used on a 4-cylinder engine. Also, check the invoice for proper tach time.

Check that the limit information on this instrument matches the published limits in your aircraft's P.O.H. or Flight Manual. Also, this information may be listed in the T.C. Data Sheet for your aircraft. Any AD's and/or STC's may set forth additional limitations on the operation of your engine. The limit information listed in the AML is for unmodified aircraft and is intended for reference only. It is the aircraft owner's and/or installer's responsibility to determine proper instrument calibration and range markings using the aircraft's P.O.H.

On the front of this instrument you will find a red light marked with the maximum RPM information. If there are any additional red or yellow lights on this instrument, the operating range of these lights can be found on a sticker located on the side of the instrument (see the AML at the back of this manual to decode this information). This instrument designates any "Caution Range" with yellow LEDs, any "Maximum and Minimum Limits" with Red LEDs and the "Safe Operating Range" with green LEDs. The "Safe Operating Range" on this instrument is equivalent to the green "Normal Operating Range" and any unmarked areas on an analog gauge.

**Read the Warranty / Agreement.** There is information in the Warranty / Agreement that may alter your decision to install this product. **If you do not accept the terms of the Warranty / Agreement, do not install this product.** This product may be returned for a refund. Contact Electronics International Inc. for details.

It is possible for any instrument to fail thereby displaying inaccurate high, low or jumpy RPM readings. Therefore, you must be able to recognize an instrument failure and you must be proficient in operating your aircraft safely in spite of an RPM instrument failure. If you do not have this knowledge, contact the FAA or a local flight instructor for training.

The pilot **MUST** understand the operation of this product before flying the aircraft. Do not allow anyone to operate the aircraft that does not know the operation of this product. Keep this Operating Manual in the aircraft at all times.

**Blank Page**

# Contents

<b>1. Important Notice: MUST READ!</b>	<b>3</b>
<b>2. Warranty / Agreement</b>	<b>6</b>
<b>3. Operating Instructions</b>	<b>7</b>
3.1 Instrument:	7
3.2 Analog Display:	7
3.3 Digital Display:	7
3.4 Mag Drop:	8
3.5 Tach Time:	8
3.6 Flight Timer and Peak RPM:	8
<b>4. Installation Instructions</b>	<b>9</b>
4.1 Important Information and Initial Check Out:	9
4.2 Route The Circular Connector:	10
4.3 Install the Isolators:	10
4.4 Route the Pickup Wires:	10
4.5 Route the Power and Ground Wires:	10
4.6 Route the Backlight Wires:	10
4.7 Route the External Warning Control Line:	11
4.8 Install the Instrument in the Panel:	11
4.9 Connect the Circular Connector to the Instrument:	11
4.10 Check Instrument Operation:	11
<b>5. R-1 Wiring Diagram</b>	<b>13</b>
<b>6. Specs &amp; Operating Features</b>	<b>14</b>
<b>7. STC Information</b>	<b>16</b>

## 2. Warranty / Agreement

Electronics International Inc. warrants this instrument and system components to be free from defects in materials and workmanship for a period of one year from the user invoice date. Electronics International Inc. will repair or replace any item under the terms of this Warranty provided the item is returned to the factory prepaid.

1. This Warranty shall not apply to any product that has been repaired or altered by any person other than Electronics International Inc., or that has been subjected to misuse, accident, incorrect wiring, negligence, improper or unprofessional assembly or improper installation by any person. **This warranty does not cover any reimbursement for any person's time for installation, removal, assembly or repair.** Electronics International retains the right to determine the reason or cause for warranty repair.
2. This warranty does not extend to any machine, vehicle, boat, aircraft or any other device to which the Electronics International Inc. product may be connected, attached, interconnected or used in conjunction with in any way.
3. The obligation assumed by Electronics International Inc. under this warranty is limited to repair, replacement or refund of the product, at the sole discretion of Electronics International Inc.
4. Electronics International Inc. is not liable for expenses incurred by the customer or installer due to factory updates, modifications, improvements, upgrades, changes, or any other alterations to the product that may affect the form, fit, function or operation of the product.
5. Personal injury or property damage do to misinterpretation or lack of understanding this product is solely the pilot's responsibility. The pilot **MUST** understand the operation of this product before flying the aircraft. Do not allow anyone to operate the aircraft that does not know the operation of this product. Keep the Operating Manual in the aircraft at all times.
6. E. I. Inc. is not responsible for shipping charges or damages incurred under this Warranty.
7. No representative is authorized to assume any other liability for Electronics International Inc. in connection with the sale of Electronics International Inc. products.
8. **If you do not agree to and accept the terms of this warranty, you may return the product for a refund.**

This Warranty is made only to the original user. **THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES OR OBLIGATIONS: EXPRESS OR IMPLIED. MANUFACTURER EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. PURCHASER AGREES THAT IN NO EVENT SHALL MANUFACTURER BE LIABLE FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING LOST PROFITS OR LOSS OF USE OR OTHER ECONOMIC LOSS. EXCEPT AS EXPRESSLY PROVIDED HEREIN, MANUFACTURER DISCLAIMS ALL OTHER LIABILITY TO PURCHASER OR ANY OTHER PERSON IN CONNECTION WITH THE USE OR PERFORMANCE OF MANUFACTURER'S PRODUCTS, INCLUDING SPECIFICALLY LIABILITY IN TORT.**

## **3. Operating Instructions**

### **3.1 Instrument:**

The R-1 is a precision RPM instrument featuring a 210 degree analog display and a full four-digit digital display. These two displays have many advantages over conventional analog gauges as described below.

Also, the R-1 features long-term accuracy and reliability. Since the R-1 does not incorporate any moving parts (needles, bearings, springs, etc.) there is little to go wrong or wear out. The internal microprocessor assures accuracy and repeatability.

### **3.2 Analog Display:**

The 210 degree analog display provides a quick reference of the engine's RPM with respect to its operating range. With a glance you can get a relative idea of how close to the maximum RPM limit the engine is being operated and approximately how far the RPM has to increase to reach its limit. Precise information is provided in the digital display.

An advantage of the analog display is its ability to emit a green, yellow or red light. With a quick glance you can determine if you're operating in a normal, caution or restricted range. Also, when you exceed a maximum limit the red light will blink 20 times at full intensity to catch your attention and warn you that a maximum limit has been violated. After 20 blinks the red light will stop blinking and display continuous red so it does not distract you. The digital display will continue to display accurate RPM readings well beyond the redline limit of the analog display.

During night operation the analog lights may be too bright. If so, turn the panel light rheostat up and the analog lights will dim. The red (maximum limit) light will always be displayed at full intensity.

### **3.3 Digital Display:**

The digital display provides RPM information in 10 RPM increments. This allows for precise setting and monitoring of the engine RPM. Also, the digital display is excellent for monitoring trends or changes in the engine's performance.

For aircraft fitted with a fixed pitch prop a relative indication of an engine's ability to produce power can be measured by accurately monitoring the engine's RPM during the first 5 seconds of a full power takeoff. A normal reduction in power will occur from high outside air temperatures, high altitudes and excessively rich mixtures. Getting to know your engine's normal takeoff RPM can go a long way in detecting engine problems early.

The 10 RPM resolution of the R-1 can also help in setting the mixture control for maximum horsepower for aircraft fitted with either a fixed or variable pitch prop. This is most helpful during high altitude climbs or take-offs. As your engine is leaned at high altitudes it may exhibit an increase in RPM. This increase in RPM indicates an increase in power. For a variable pitch prop this will be a small change. It is not recommended to lean an engine when operated above 75% power. Consult your engine manufacturer's operating procedures for proper operation.

If the digital display backlight has been permanently powered up (as recommended), the digital display will be easier to see during low ambient light conditions and at night.

### **3.4 Mag Drop:**

The mag drop feature allows you to view a change in RPM from a baseline. Start by setting the throttle to achieve normal run-up RPM. Then push both buttons on the R-1. This establishes your base line RPM and the display will show “000”. Any change in RPM (up or down from the base line) will be displayed. RPM drops will be displayed as negative numbers (i.e.: a “- 200” display means a 200 RPM drop from the base line). Now switch the mag to “Left” or “Right” and the RPM drop will be displayed. Switch your mag back to “Both” and the display will return to “000” or near “000”. Most mags will not totally recover back to “000”. A problem (fouled plug, bad mag wire, mag problems, etc.) will show up as excessive drop in one mag and the recover RPM (how close it returns to “000”) will be excessive. The mag drop feature can be used to check prop governors, horsepower gain or loss during leaning and may other engine operations.

During mag drop operation the analog display will continue to show proper engine RPM. The Mag drop operation will automatically be canceled in 60 seconds or it may be canceled at any time by pushing any button on the R-1.

### **3.5 Tach Time:**

The tach timer keeps a running total of time the engine is above 1300 RPM. The time is stored in memory for life. There are no internal batteries and bus power is not required to keep the memory alive. The maximum reading is 99,999.9 hours.

To display the time on the tach in thousands of hours, press the right push button marked “Tach Time” and hold the button in. The digital display will show two digits which represent thousands of hours on the tach.

**To display the hundreds, tens, units and 1/10 hours on the tach, release the “Tach Time” button for no more than two seconds and press it again and hold it in.** The display will show four digits with a decimal point. The digits represent hundreds, tens, units and 1/10 hours on the tach. Each time the “Tach Time” button is pushed and held in the display, it will toggle between the two displays. If the “Tach Time” button is released for more than three seconds the digital and analog displays will revert back to RPM.

### **3.6 Flight Timer and Peak RPM:**

This instrument includes an automatic flight timer. When the RPM meets or exceeds 2000 RPM for 10 seconds (as would occur on takeoff), the flight timer will reset to “00.00” and start timing in one-minute increments. The peak RPM register will also be reset to “0000”. The flight timer will continue to count until the RPM drops below 1200 RPM for 10 seconds (as would occur on the landing rollout). At this point the flight time and peak RPM will be stored in memory. There are no internal batteries and bus power is not required to keep the memory alive. Your last flight time and peak RPM will always be available even if the power is turned off.

As the flight timer is counting, the maximum RPM is also being recorded. For an RPM to be recorded as “peak” it must exceed the last recorded RPM for three seconds or longer.

To display flight time, press the push button marked “Flt Time” and hold it in. The digital display will show your flight time in hours and minutes.

To display the highest RPM your engine reached during the flight release the “Flt Time” button for no more than two seconds and press it again and hold it in. The digital display will show the peak RPM reached during the flight. Each time the “Flt Time” button is pushed and held in the display will toggle between flight time and peak RPM. If the “Flt Time” button is released for more than three seconds the digital and analog display will revert back to RPM.



## 4. Installation Instructions

### **4.1 Important Information and Initial Check Out:**

1. **The installer and aircraft owner must read the Warranty before starting the installation.** There is information in the Warranty that may alter your decision to install this instrument. **If you do not accept the terms of the Warranty, do not install this instrument.**
2. If you are not an FAA Certified Aircraft Mechanic familiar with the issues of installing aircraft RPM instruments, **Do Not attempt to install this instrument.** The installer should use current aircraft standards and practices to install this instrument (refer to AC 43.13).
3. **Check that any necessary FAA Approvals (STC's, etc.) are available for your aircraft before starting the installation. The FAA Approved Model List (AML) is located at the back of this manual. Resolve any issues you may have before starting the installation.**
4. Before starting installation, read the entire Installation Instructions and resolve any installation, operating and performance issues you may have. This may eliminate any delays once the installation is started. If the tach cable is removed, an RPM cap is available to cover the port (see price sheet).
5. Check that the instrument make and model marked on the side of the instrument and on the invoice are correct before starting the installation. An R-1-6 is used on a 6-cylinder engine and an R-1-4 is used on a 4-cylinder engine. The R-1-X-LM or R-1-X-L2 is to be used on a Lasar ignition system (or any system with a tach out). Also, check the invoice for proper tach time.
6. Check that the limit information on this instrument matches the published limits in your aircraft's P.O.H. or Flight Manual. Also, this information may be listed in the T.C. Data Sheet for your aircraft. Any AD's and/or STC's may set forth additional limitations on the operation of your engine. The limit information listed in the AML is for unmodified aircraft and is intended for reference only. **It is the aircraft owner's and/or installer's responsibility to determine proper instrument calibration and range markings for your aircraft.**

On the front of this instrument you will find a red light marked with the maximum RPM information. If there are any additional red or yellow lights on this instrument, the operating range of these lights can be found on a sticker located on the side of the instrument (see the AML at the back of this manual to decode this information). This instrument designates any "Caution Range" with yellow LEDs, any "Maximum and Minimum Limits" with Red LEDs and the "Safe Operating Range" with green LEDs. The "Safe Operating Range" on this instrument is equivalent to the green "Normal Operating Range" and any unmarked areas on a analog gauge.

Do not attempt to remove or replace the limit stickers on this instrument. If the RPM limits for your engine do not match those which are marked on this instrument send this unit back to Electronics International Inc. for re-calibration. **DO NOT install or use a primary engine instrument that is not properly calibrated for your aircraft.**

7. Before starting the installation make sure the unit will fit in the location you intend to install it without obstructing the operation of any controls.
8. If this instrument is to replace an existing unit in the aircraft, it is the installer's responsibility to move or replace any existing instruments or components in accordance with FAA-approved methods and procedures. The following Installation Instructions do not cover moving or the removal of any existing instruments or components.

---

## **4.2 Route The Circular Connector:**

Starting from under the instrument panel, route the circular connector end of the wire harness up to the instrument mounting location. (See the wiring diagram at the back of this manual). Place the circular connector about 8 inches back from the panel. Tie wrap the harness in place approximately 1 foot back from the circular connector. This will allow the harness to be flexible and accommodate varying lengths in instrument wires. **Be sure these wires do not obstruct the freedom of travel of any controls.**

## **4.3 Install the Isolators:**

On the back of the mag switch will be a number of lugs. Locate the two lugs connected to the left and right mag leads (P leads). Connect the two isolators supplied with the kit to these lugs (see wiring diagram). When installing these isolators do not remove the existing mag leads (P leads). **These isolators should not be changed, lengthened or altered in any way.** There is another set of isolators in the instrument. These isolators insure safe operation while providing an easy and simple installation free of mechanical cables and pickups. **Make sure the mag lead screws are tight and the connectors are not interfering or shorting to any other terminals on the mag switch.**

## **4.4 Route the Pickup Wires:**

Route the orange wire and the brown wire from the wire harness to the isolators. Cut to length and install a male slip-on connector on each wire. Double over the stripped wire before inserting it into the male connector. Double crimp the connector making sure the crimping tool closes completely. Now mate the orange wire and the brown wire to the female connectors on the isolators. Either wire may connect to either isolator. Be sure the connectors mate properly. If the tab in the male connector gets bent, it can wedge itself between the red nylon and the female metal receptacle. This can result in an intermittent connection after about a month or more. If the connectors are removed several times, the female connector can become loose. If this happens, use a pair of needle nose pliers and tighten the metal receptacle inside the female connector. **Tie wrap these wires so they do not obstruct the freedom of travel of any controls.**

## **4.5 Route the Power and Ground Wires:**

Route the red wire in the wire harness to the aircraft's 12 or 24 volt main or emergency bus as applicable via an independent circuit breaker (five amps or less). An alternate method would be to route the red lead to the bus via a one amp inline fuse. With this method a spare fuse should be kept in the aircraft.

Route the black wire in the wire harness to a good ground. **Tie wrap these wires so they do not obstruct the freedom of travel of any controls.**

## **4.6 Route the Backlight Wires:**

Connect the backlight wires as follows:

1. It is recommended to permanently power up the digital display backlight.
  - a) For a 12-volt system connect the white/brown wire to the instrument red power lead. Connect the white/red wire to ground (see Wiring Diagram).
  - b) For a 24-volt system leave the white/brown open and connect the white/red wire to the instrument red power lead (see Wiring Diagram).

2. Connect the white/orange wire to the panel light rheostat. This wire will dim the analog LEDs for night operation when the panel lights are turned on. If this line is left open, the analog LEDs will remain at full intensity at all times. Also, if the voltage on this line drops below 11.5 volts, the analog LEDs will be displayed at full intensity. **Tie wrap all wires so they do not obstruct the freedom of travel of any controls.** Note: This line may be connected to the CP-1 Intensity Control Pot (see price sheet).

#### **4.7 Route the External Warning Control Line:**

The white/yellow wire can be connected to an external light (AL-1), buzzer (ATG-1), voice annunciator (AV-17), a relay, etc. This wire grounds when the red warning light is on. The current in this line must be limited to 1/10 of an amp maximum. Exceeding this limit will damage the unit. If this feature is not used leave this line open. **Tie wrap this wire so it does not obstruct the freedom of travel of any controls.**

#### **4.8 Install the Instrument in the Panel:**

Install the instrument from behind the instrument panel using 6 x 32 screws. **These screws should not be any longer than 1/2"**.

#### **4.9 Connect the Circular Connector to the Instrument:**

1. Push the two mating connectors together and twist them until they snap into position.
2. Turn the locking ring on the instrument connector clockwise (1 1/2 turns) until it locks into position.

#### **4.10 Check Instrument Operation:**


To check instrument operation perform the follows:

1. Turn the master switch on and verify that the instrument sequences through all the analog lights and reads "8888" on the digital display for 3 seconds or less and then switches to "0000." A problem at this step could be caused by poor connections on the red and/or black leads.
2. Check the digital display backlight. With high or medium ambient light it is hard to see the digital display backlight (it is only required during low ambient light conditions but should be on all the time).
3. Start the aircraft engine and allow it to idle with the mag switch on "Both." The digital and analog display should be reading properly. An engine's RPM will fluctuate 10 to 20 RPM at low idle. A problem at this step could be caused by a poor or improper connection on the brown or orange mag wires. To troubleshoot, connect the brown mag wire to the mag (through an isolator), leave the orange mag wire disconnected and look for proper operation with the engine at a stable idle RPM. Then connect the orange mag wire to the mag (through an isolator) and leave the brown mag wire disconnected. Look for proper operation with the engine at a stable idle RPM.
4. With all wires connected and the engine at idle select "Left" on the mag switch. Check the analog and digital display for proper operation. A large drop in the RPM for one second is normal. The microprocessor is switching to the other mag. Do this same test for the right mag. A problem at this step could be caused by a poor or improper connection on the brown or orange pickup cables. To troubleshoot see step 3 above.

5. Bring the engine RPM up to 1500 and look for proper operation. A jumpy high RPM reading at this step may be caused by a higher than normal voltage output from a Bendix Mag. If this is the case, install the Bendix Isolators supplied in your R-1 package.
6. Check that the screws on the mag switch have been properly tightened and **the connectors are not interfering with or shorting to any other terminals on the mag switch.**

# 5. R-1 Wiring Diagram

05081304 Rev. C

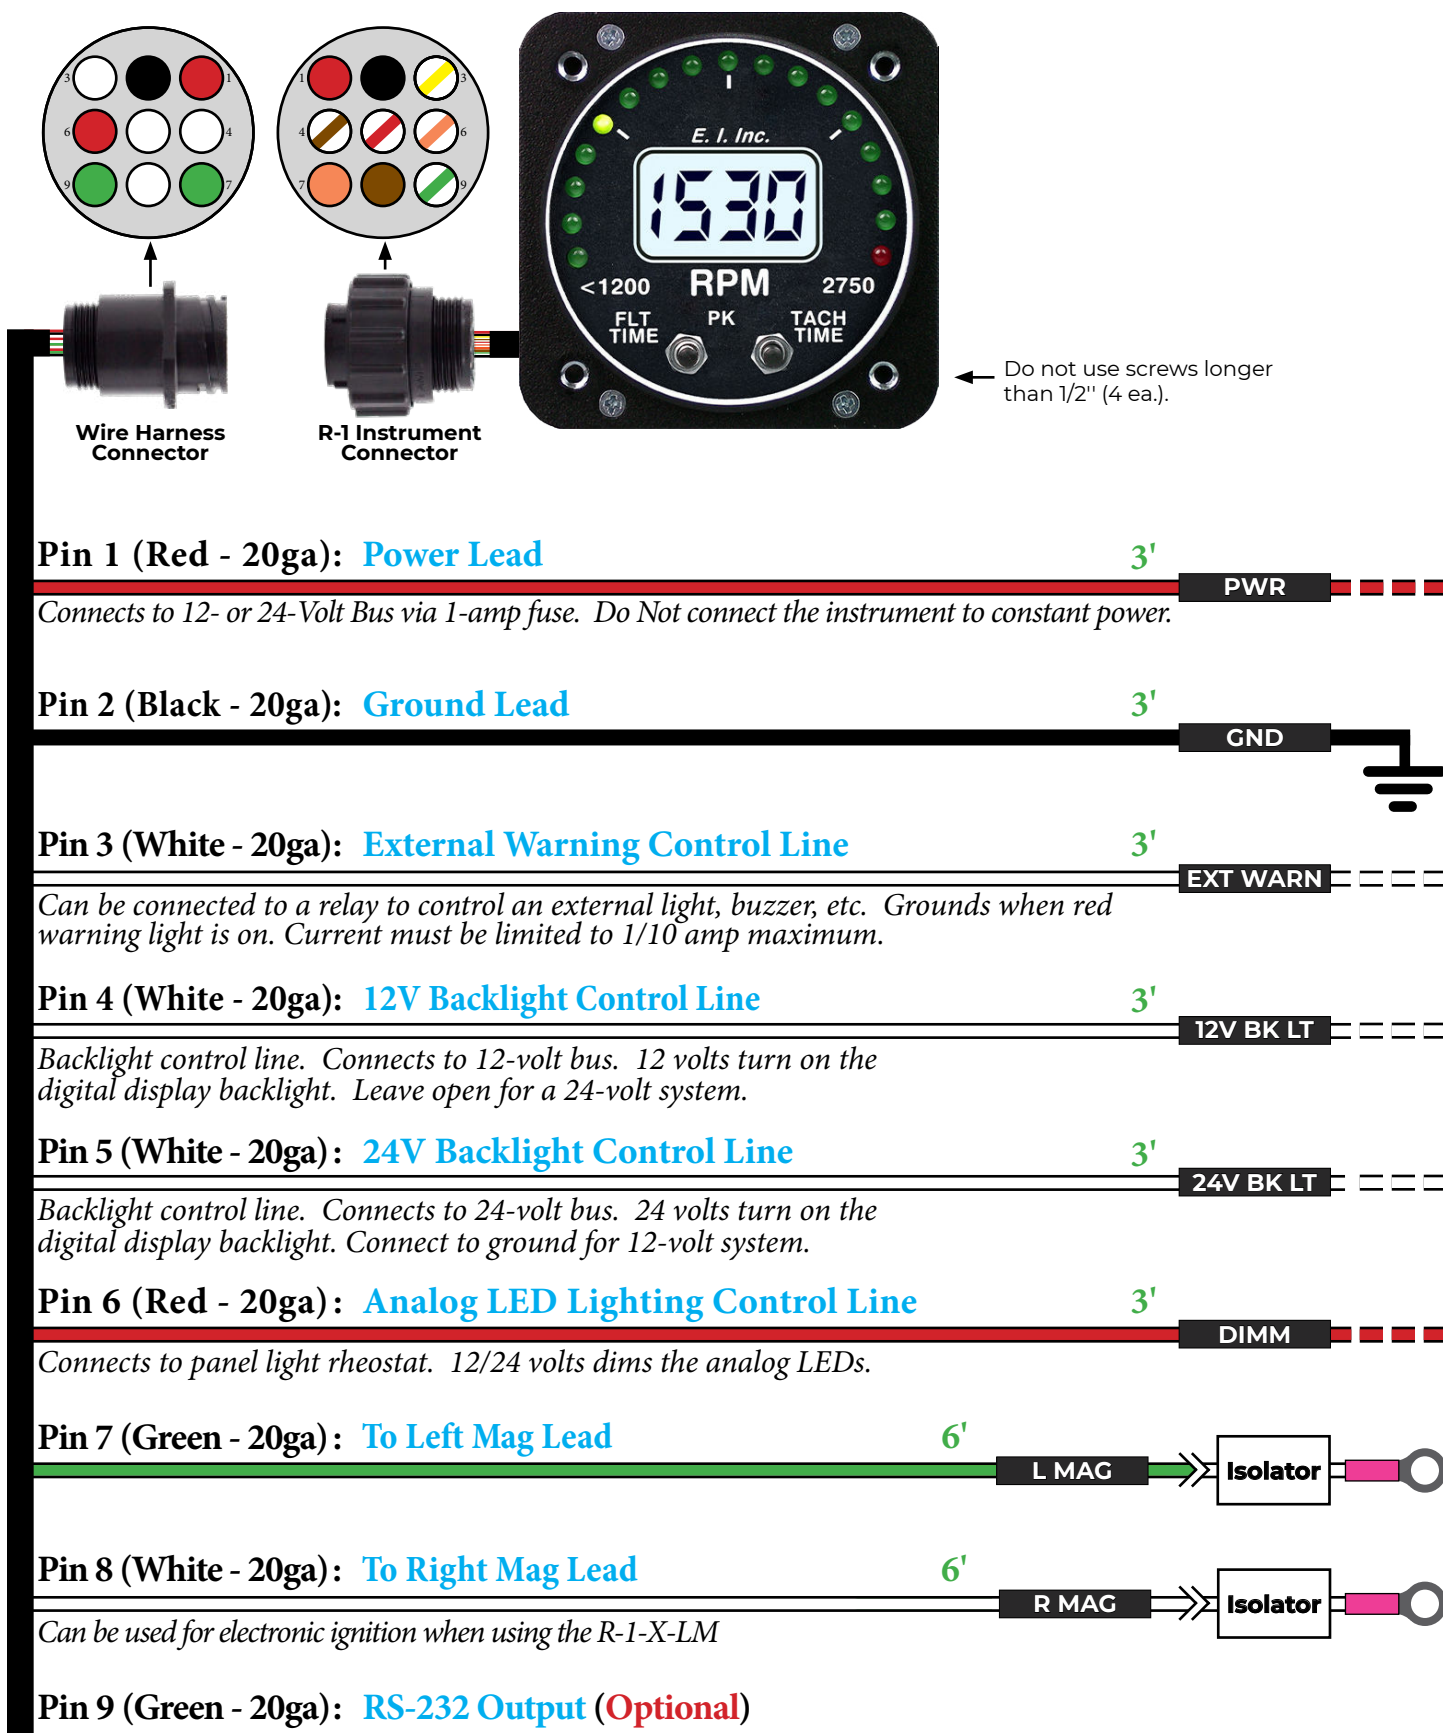

## **6. Specs & Operating Features**

### **Model:**

R-1 (RPM Instrument)

### **Case Dimensions:**

2.5" x 2.5" x 3.65" depth, 2 1/4" Bezel.

### **Weight:**

10 Oz.

### **Environmental:**

Meets TSO C49a.

### **Power Requirements:**

7.5 to 30 Volts, 1/10 Amp.

### **Analog Display:**

17 High Intensity Light Emitting Diodes (LEDs) in a 210 degree arc with Intensity Control Line available for dimming. Sequential flash test on power up. Microprocessor eliminates LED hunting (flicker).

### **Red LEDs:**

If the Analog Display goes from a Green LED or Yellow LED to a Red LED, the Red LED will blink 20 times then go solid red. The Red Max Limit LED is always displayed at full intensity.

### **Digital Display:**

LCD (viewable in direct sunlight), with 12 and 24 volt backlight control wires for night operation. Readings below 300 RPM will be displayed as "0000". Display will read "8888" on power up.

### **Accuracy:**

1% in accordance with TSO C49a.

### **Resolution:**

10 RPM.

### **Max Digital Range:**

4300 RPM.

### **Update Time:**

3 times per second.

**Signal Pickup:**

Connects to Left and Right Mag Leads through isolators. Safety insured by additional in-line isolators located in the unit. Instrument will operate on Mags, CDIs and automotive ignition systems. No cables or mechanical connections required.

**Tach Time:**

Keeps a running total time for RPM readings at or above 1300 RPM. Time is stored in memory for life. There are no internal batteries and power is not required to keep memory alive. Maximum reading is 99,999.9 hours. Displayed in .1 hour increments.

**Automatic Flight Time:**

Resets to "00.00" and starts timing when RPM reading reaches or exceeds 2000 for 10 seconds. Stops Flight Timer and holds reading in memory when RPM drops below 1200 RPM for 10 seconds. Maximum reading is 99.59 (99 hours and 59 minutes). Displayed in 1 minute increments.

**Peak RPM:**

Operates in conjunction with the Automatic Flight Timer. Stores the highest RPM for the flight. For an RPM to be recorded as "peak" it must exceed the last recorded peak RPM for 3 seconds or longer.

**External Warning Control Line:**

Grounds when any Red Warning Light is on or blinking. Current should be limited to 2/10 amp.

## 7. STC Information

The R-1 is TSO'd, STC'd and PMA'd as a primary instrument. If you have any question on which aircraft are included on our Approved Model List (AML), please call our factory.

United States of America  
Department of Transportation - Federal Aviation Administration  
**Supplemental Type Certificate**

*Number* SA5924NM

*This certificate, issued to* Electronics International, Inc.

*certifies that the change in the type design for the following product with the limitations and conditions*

*therefor as specified hereon meets the airworthiness requirements of Part \* of the \**

*Regulations:*

*Original Product* *Type Certificate Number:*

\* See attached FAA Approved Model List (AML)

*Make:*

\* No. SA5924NM for list of approved airplane

*Model:*

\* models and applicable regulations.

*Description of Type Design Change:* Electronics International RPM instrument manufactured and installed in accordance with the drawings and installation instructions specified on the FAA Approved Model List (AML) of this STC, or later FAA approved revisions.

*Limitations and Conditions:* Approval of this change in type design applies to the above model aircraft only. This approval should not be extended to other aircraft of this model on which other previously approved modifications are incorporated unless it is determined that the relationship between this change and any of those other previously approved modifications, including changes in type design, will introduce no adverse effect upon the airworthiness of that aircraft. A copy of this certificate and FAA Approved Model List (AML) No. SA5924NM, dated February 17, 1993, or later FAA approved revision, must be maintained as part of the permanent records for the modified aircraft.

*This certificate and the supporting data which is the basis for approval shall remain in effect until sur-*

*rendered, suspended, revoked, or a termination date is otherwise established by the Administrator of the*

*Federal Aviation Administration.*

*Date of application:* November 10, 1992

*Date issued:*

*Date of issuance:* February 17, 1993

*Date amended:*



*By direction of the Administrator*

*Donald J. May*  
(Signature)

Acting Manager, Special Certification Branch  
Seattle Aircraft Certification Office

(Title)

*Any alteration of this certificate is punishable by a fine of not exceeding \$1,000, or imprisonment not exceeding 3 years, or both.*

*This certificate may be transferred in accordance with FAR 21.47.*

FAA FORM 8130-2 (10-58)



FAA Approved Model List (AML) SA5924NM for Electronics International RPM Instrument										
Issue Date: February 17, 1993										
Item	Aircraft Make	Aircraft Model	Original Type Certificate Number	Cert. Basis for Alt.	FAA Sealed Drawings		Installation Instructions		E.I. Instrument Model Number (See Note 1) ( ) = See Note	AML Amended Date
					Number	Rev No.	Number	Rev. No.		
----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
1.	Aeronca Inc. (Also see American and Bellanca)	50-LA 65-LA, LB 15AC, S15AC	A-702 A-702 A-802	Car 4a " " Car 3	TD0326921	A	OI 0517911	C	R-1-4-G30R230 R-1-4-G30R255 R-1-4-G30R270	6/3/94 " "
2.	Aerospatiale	See Socata.	-----	-----	-----	---	-----	-----	-----	6/3/94
3.	American Blimp	A-60, A-60+	AS1NM	FAR 21	"	"	"	"	R-1-4-G30Y260R300	10/30/97
4.	American Champion (Also see Aeronca and Bellanca)	7AC, S7AC 78CM, 7DC, S7DC 70CM, S70CM, 7JC, 7EC, S7EC, S7CF S7GC, 7HC 7GCA, 7GCB, 7KC, 7GCBA, 7GCAA 7GCBC, 7KCAB 7ECA 8KCAB 8GCBC 11AC, S11AC 11BC, S11BC 11C, S11C	A-759 " " " " " " " " A21CE " A-761 " A-796	CAR 4 " " " " " " " " FAR 21 Far 23 CAR 4a CAR 4a Car 3	" " " " " " " " " " " " " "	" " " " " " " " " " " " " "	" " " " " " " " " " " " " "	" " " " " " " " " " " " " "	R-1-4-G30R2300 R-1-4-G30R257 R-1-4-G30R247 R-1-4-G30Y260R280 R-1-4-G30R270 R-1-4-G30R270 R-1-4-G30R275 R-1-4-G30Y255R270 R-1-4-G30Y240R270 R-1-4-G30R230 R-1-4-G30R2575 R-1-4-G30R2575	6/3/94 " " " " " " " 10/30/97 " " " " "
5.	Aviat Inc. (Pitts)	A-1 S-1S S-1T S-2 S-2A S-2S, -2B	A22NM A8SO " " " "	FAR 23 FAR 21 " " " "	" " " " " "	" " " " " "	" " " " " "	" " " " " "	R-1-4-G30R270 R-1-4-G30R270 R-1-4-G30Y200G236R270 R-1-4-G30Y215G236R270 R-1-4-G30Y200G236R270 R-1-6-G30R270	6/3/94 " " " " " "



FAA Approved Model List (AML) SA5924NM for Electronics International RPM Instrument										
										Issue Date: February 17, 1993
Item	Aircraft Make	Aircraft Model	Original Type Certificate Number	Cert. Basis for Alt.	FAA Sealed Drawings		Installation Instructions		E.I. Instrument Model Number (See Note 1) ( ) = See Note	AML Amended Date
					Number	Rev. No.	Number	Rev. No.		
----	-----	-----	-----	-----	TD0336921	A	OI 0517911	C	-----	-----
7.	Bellanca Aircraft Corporation (Also, see American Champion)	14-19 17-30 17-31 17-31TC 17-30A 17-31A 17-31ATC	1A3 " " A18CE " "	Car 3 " " FAR 23 " "	" " " " " "	" " " " " "	" " " " " "	" " " " " "	R-1-6-630R255 R-1-6-630R270 R-1-6-630R257 R-1-6-630Y240R257 R-1-6-630R270 R-1-6-630R270 R-1-6-630R2575	6/3/94 " " " " " "
8.	Boeing Aircraft	A 75 J1 (Steeleman) 1B75A	A-743 "	CAR 4a "	" "	" "	" "	" "	R-1-7-630R200 R-1-9-630Y195R230	10/30/97 "

Page 4 of 10



FAA Approved Model List (AML) SA5924NM for Electronics International RPM Instrument											
Issue Date: February 17, 1993											AML Amended Date
Item	Aircraft Make	Aircraft Model	Original Type Certificate Number	Cert. Basis for A/C.	FAA Sealed Drawings		Installation Instructions		E.I. Instrument Model Number (See Note 1) ( ) = See Note	AML Amended Date	
					Number	Rev. No.	Number	Rev. No.			
11.	DeHavilland Aircraft of Canada, Ltd.	DHC-2 DHC-3	A-806 A-815	CAR 10 CAR 10	"	"	OI 0517911	C	R-1-6-G30Y200R220 R-1-6-G30Y200R220	6/3/94 6/3/94	
12.	Extra Flugzeugbau	EA 300, -S	A67EU	FAR 23	"	"	"	"	R-1-6-G30Y240R270	10/30/97	
13.	Fairchild	24 C8C 24 R9	A-535 A-706	Bul 7a Car 4a	"	"	"	"	R-1-8-G30R205 R-1-6-G30R245	10/30/97	
14.	Grunman	F8F-2 AF-2S w/R-2800-48	AR-32 AR-36	CAR 8 "	"	"	"	"	R-1-18-G30R260 R-1-18-G30Y260R280	10/30/97	
15.	Gulfstream American Corp. (Grunman Aircraft)	AA-5, -5A, -5B AA-1, -1A, -1B AA-1C	A16EA " "	FAR 23 " "	"	"	"	"	R-1-4-G30R2700 R-1-4-G30R2600 R-1-4-G30R2700	6/3/94 " "	
16.	Helio Aircraft (Taylorcraft)	15A 20 w/0-470-A 20 w/0-470-J	3A3 " "	CAR 4a " "	"	"	"	"	R-1-6-G30R2600 R-1-6-G30R2450 R-1-6-G30R2550	10/30/97 " "	
17.	Helio Enterprise	H-250 H-295, HT-295, F-295 H-391, -391B, -395, -395A H-700 H-800	1A8 " " " "	CAR 3 " " " "	"	"	"	"	R-1-6-G30R257 R-1-6-G30Y300R340 R-1-6-G30Y300R340 R-1-6-G30R257 R-1-8-G30R265	10/30/97 " " " "	
18.	Interceptor (Aero Commander) (Meyers)	200 200A, 200B 200D	3A18 " "	Car 3 " "	"	"	"	"	R-1-6-G30R260 R-1-6-G30R262 R-1-6-G30R270	10/30/97 " "	
19.	Lake	See Revo.								6/3/94	
20.	Luscombe	8 8A 8B 8C, 8D 8E 8F, T-8F	A-694 " " " " "	CAR 4a " " " " "	"	"	"	"	R-1-4-G30R190 R-1-4-G30R235 R-1-4-G30R255 R-1-4-G30R260 R-1-4-G30R257 R-1-4-G30R247	6/3/94 " " " " "	




FAA Approved Model List (AML) SA5924NM for Electronics International RPM Instrument										
Issue Date: February 17, 1993										
Item	Aircraft Make	Aircraft Model	Original Type Certificate Number	Cert. Basis for Alt.	FAA Sealed Drawings		Installation Instructions		E.I. Instrument Model Number (See Note 1) ( ) = See Note	AML Amended Date
					Number	Rev No.	Number	Rev. No.		
-----										
25.	Piper Aircraft Corp.	PA-12, -12S	A-797	CAR 3	"	"	"	"	R-1-4-G30R260	10/30/97
		PA-14	A-780	"	"	"	"	"	R-1-4-G30R280	"
		PA-15	A-800	CAR 3	"	"	"	"	R-1-4-G30R255	8/5/94
		PA-16	A-1A	"	"	"	"	"	R-1-4-G30Y260R280	"
		PA-17	A-805	"	"	"	"	"	R-1-4-G30R230	"
		PA-18	1A2	CAR 3	"	"	"	"	R-1-4-G30Y235R247	"
		PA-(18 or 18A or 18S) "125"	"	"	"	"	"	"	R-1-4-G30Y245R260	"
		PA-(18 or 18A or 18S) "135"	"	"	"	"	"	"	R-1-4-G30Y245R260	"
		PA-(18 or 18A or 18S) "150"	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-19	"	"	"	"	"	"	R-1-4-G30R247	"
		PA-20, -20S, -20-115, -20S-115	1A4	"	"	"	"	"	R-1-4-G30Y245R260	"
		PA-20-135	"	"	"	"	"	"	R-1-4-G30Y245R260	"
		PA-22, -22-108, -22-135, -22S-135	1A6	"	"	"	"	"	R-1-4-G30Y245R260	"
		PA-22-150, -22S-150, -22S-160	1A10	"	"	"	"	"	R-1-4-G30R270	"
		PA-23	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-23-160	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-23-235	"	"	"	"	"	"	R-1-6-G30R257	"
		PA-E23-250	"	"	"	"	"	"	R-1-6-G30R257	"
		PA-24	1A15	"	"	"	"	"	R-1-4-G30R270	"
		PA-24-250	"	"	"	"	"	"	R-1-6-G30R257	"
		PA-24-260	"	"	"	"	"	"	R-1-6-G30R257	"
		PA-24-400	"	"	"	"	"	"	R-1-6-G30R257	"
		PA-25	2A8	"	"	"	"	"	R-1-8-G30R265	"
		PA-25-235	"	"	"	"	"	"	R-1-6-G30R270	"
		PA-25-260	"	"	"	"	"	"	R-1-6-G30R270	"
		PA-28-140	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-28-150	2A13	"	"	"	"	"	R-1-4-G30R270	"
		PA-28-151	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-(28 or 28S)-160	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-28-161	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-28-180, PA-28S-180	"	"	"	"	"	"	R-1-4-G30R270	"
		PA-28R-180	"	"	"	"	"	"	R-1-4-G30Y200G220R270	"
		PA-28-181	"	"	"	"	"	"	R-1-4-G30Y265R270	"
		PA-28R-200 w/ Hart. Prop.	"	"	"	"	"	"	R-1-4-G30Y210G235R270	"
		PA-28R-200 w/ McCauley Prop.	"	"	"	"	"	"	R-1-4-G30Y150G195R270	"
		PA-28-201T	"	"	"	"	"	"	R-1-6-G30Y200G220R257	"
		PA-28R-201	"	"	"	"	"	"	R-1-4-G30Y150G195R270	"
		PA-28RT-201 w/ S/N => 8018001	"	"	"	"	"	"	R-1-4-G30Y150G190R270	"
		PA-28RT-201 w/ S/N < 8018001	"	"	"	"	"	"	R-1-4-G30Y265R270	"
		PA-28R-201T, PA-28-235	"	"	"	"	"	"	R-1-6-G30Y200G220R257	"
		PA-28RT-201T	"	"	"	"	"	"	R-1-6-G30Y200G220R257	"
		PA-28-236	"	"	"	"	"	"	R-1-6-G30R240	"
		PA-30	A1EA	"	"	"	"	"	R-1-4-G30R270	"
		PA-31	A20S0	"	"	"	"	"	R-1-6-G30R257	"
		PA-31-325	"	"	"	"	"	"	R-1-6-G30R257	"
		PA-31-300	"	"	"	"	"	"	R-1-6-G30R270	"



FAA Approved Model List (AML) SA5924NM for Electronics International RPM Instrument										
Issue Date: February 17, 1993										
Item	Aircraft Make	Aircraft Model	Original Type Certificate Number	Cert. Basis for Alt.	FAA Sealed Drawings		Installation Instructions		E.I. Instrument Model Number (See Note 1) ( ) = See Note	AML Amended Date
					Number	Rev. No.	Number	Rev. No.		
25.	Piper Aircraft Corp. (Cont.)	PA-32-260, -32-300, -32R-300 PA-32S-300, -32RT-300 PA-32RT-300T PA-32-301T, -32R-301T PR-32-301, -32R-301 PA-34-200 PA-34-200T PA-34-220T PA-36-285 PA-36-300 PA-36-375 PA-38-112 PA-44-180 PA-44-180T PA-46-310P PA-46-350P	A3SO " " " " A7SO " A9SO " " A18SO A19SO A25SO "	CAR 3 " " " " FAR 23 " " " " " " " "	TD0326921 " " " " " " " " " " " " " "	" " " " " " " " " " " " "	OI 0517911 " " " " " " " " " " " " "	" " " " " " " " " " " " " "	R-1-6-G30R270 R-1-6-G30R270 R-1-6-G30Y257R270 R-1-6-G30Y257R270 R-1-6-G30Y260R270 R-1-4-G30R270 R-1-6-G30R257 R-1-6-G30R260 R-1-6-G30R400 R-1-6-G30R270 R-1-8-G30R250 R-1-4-G30R260 R-1-4-G30R270 R-1-4-G30R257 R-1-6-G30R260 R-1-6-G30R250	8/5/94 " " " " " " " " " " " " " " " " "
26.	Pitts	See Avail.	-----	-----	-----	---	-----	-----	-----	6/3/94
27.	Revo Inc. (Lake)	C-1, -2 LA-4, -4A, -4P LA-200 250	1A13 " " "	" " " "	" " " "	" " " "	" " " "	" " " "	R-1-4-G30R270 R-1-4-G30R270 R-1-4-G30Y200G236R270 R-1-6-G30R257	6/3/94 " " "
28.	Rockwell Int. Corp.	See Commander.	-----	-----	-----	---	-----	-----	-----	6/3/94
29.	Schweizer	G-164 W/W-670-6A	1A16	Car 8	"	"	"	"	R-1-7-G30R2075	10/30/97
30.	Sky	RC 2, 3, 4	A-769	Far 21	"	"	"	"	R-1-6-G30R250	6/3/94
31.	Socata Group (Aerospatiale)	TB9 TB10 TB20, TB21 TB-200	A51EU " " "	CAR 3 " " "	" " " "	" " " "	" " " "	" " " "	R-1-4-G30R270 R-1-4-G30Y200G226R270 R-1-6-G30R257 R-1-6-G30R270	6/3/94 " " " "
32.	Stinson	See Univair.	-----	-----	-----	---	-----	-----	-----	6/3/94
33.	Swift (Globe)	GC-1A GC-1B	A-766 "	CAR 4a "	" "	" "	" "	" "	R-1-4-G30R2575 R-1-6-G30R2550	10/30/97 "
34.	Thompson, Jimmie, Enterprise (Navion)	A B C, D, E F, G H	A-782 " " " " "	CAR 3 " " " " "	" " " " "	" " " " "	" " " " "	" " " " "	R-1-4-G30R230 R-1-6-G30R300 R-1-6-G30R260 R-1-6-G30R262 R-1-6-G30R270	6/3/94 " " " " "

FAA Approved Model List (AML) SA5924NM for Electronics International RPM Instrument										Issue Date: February 17, 1993	
Item	Aircraft Make	Aircraft Model	Original Type Certificate Number	Cert. Basis for Alt.	FAA Sealed Drawings		Installation Instructions		E.I. Instrument Model Number ( See Note 1) ( ) = See Note	AML Amended Date	
					Number	Rev No.	Number	Rev. No.			
---	-----	-----	-----	-----	---	-----	---	-----	---	-----	
35.	Univair Aircraft Corp. (Stinson)	108, 108-1 108-2, -3, -5	A-767 "	CAR 3 "	" "	" "	" "	" "	R-1-4-G3OR260 R-1-4-G3OR280	6/3/94 "	
36.	Zenair	CH2000	TA5CH	FAR 21	"	"	"	"	R-1-4-G3OR280	10/30/97	
--	-- End of List --	-----	-----	-----	-----	-----	---	-----	-----	-----	

Note 1: Electronics International Instrument Model Designation System.



A combination of letters and numbers defining the green, yellow and red RPM Arcs that the analog portion of the instrument was programmed to.

A number corresponding to the number of cylinders the instrument was calibrated to.

A Letter here indicates any major changes in the hardware and/or software of the instrument.

Indicates the base model number of the instrument.

Example: R-1-4-G80Y210G235R260 indicates a 4 cylinder engine with the following markings and calibration: a green arc from 800 to 2090 RPM, a yellow arc from 2100 to 2340 RPM, a green arc from 2350 to 2590 and red from 2600 on up. Arc information is for reference only.

Note (2): For carbureted engines use the following placard, "Carb Ht Below 1900".

Note (3): For carbureted engines use the following placard, "Carb Ht Below 2000".

Note (4): For carbureted engines use the following placard, "Carb Ht Below 2100".

Note (5): For carbureted engines use the following placard, "Carb Ht Below 2200".

FAA Approved:

Acting Manager, Seattle  
Aircraft Certification Office

Date: Nov. 24, 1997

**Blank Page**

Providing Excellent Products and  
Exceptional Customer Service Since 1979



***Electronics***  
***International Inc.***